Mud Sucker® **Diaphragm Pumps**

B Series

Solids Crushing Diaphragm Pumps

: 4B-EC™ Standard Piping

3В-ЕС™ In-line Piping

FEATURES4" Connection size Pump up to 110 GPM Transfer spherical solids up to 2 1/4" or 50% by volume Pump up to 50' vertical or 300' horizontal

143/4" heavy duty diaphragm Multiple drive options and industry specific components.







Performance Range

Max. capacity	110 GPM
Max. suction lift	25'vertical or 75' horizontal
Max. discharge head	50' vertical or 300' horizontal
Solids handling	21/4" dia or 50% by volume


Pump and Motor Specifications

Suction inlet/outlet size	4"x4"			
Max. liquid temperature	104°F (40°C) continuous			
Pump body casing	Cast iron (ASTM A356, Class 30)			
Diaphragm	14¾" dia thermoplastic elastomer (red) Severe duty -25°F to 212°F Optional: Neoprene			
Ball valves	5-1/8" diameter polyurethane with steel core			
Gearbox	Helical bevel cast iron housing with heat treated gears			
Hardware	Zinc plated			
Rod end bearing body	Cast iron, protective coated for corrosion resistance			
Ball bearing	Cast iron , protective coating for corrosio resistance			
Ultimate radial static load capacity	9,000 Lbs			

Motor Options

Description	Part No.	Motor Option
Standard motor (TEFC)	61737-00	5 hp, 1800RPM/3/60/230-460V
Single phase (TEFC)	61737-10	5 hp, 1800RPM/1/60/230V
Explosion proof (three phase, TEXP)	61737-20	5 hp, 1800RPM/3/60/230-460V
Explosion proof (single phase, TEXP)	61737-30	3 hp, 1800RPM/1/60/115-230V

4B Series

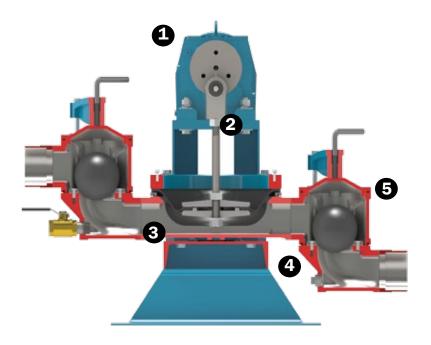

- Premium drive systems form the industry's top rated manufacturers.
- Heavy duty crank arm designed to pump the tough stuff at 110 GPM (max).
- 3 Exclusive Wastecorp engineered contoured velocity channel to move fluids without clogging.
- Heavy duty cast iron pump body for unmatched durability.
- Valve chambers crush solids or make slur- ries easier to pump. crushing performance.

Professional Options for Professional Applications



Wastewater Containment System 4B Series - Trolley Mounted



4B Series - Trailer Mounted



Wastewater Containment System

T

4B Series - Trailer Mounted

Mud Sucker® Diaphragm Pumps

Toll-Free North America 1.888.829.2783

Worldwide E-201.445.2882 inf

Website

http://www.wastecorp.com

E-mail

info@wastecorp.com



Mud Sucker B Series pumps are designed and specified to pump landfill leachate, agricultural waste, select manure pumping applications, mining waste, bauxite waste pumping, waste oil, biodiesel applications, coal slurry, tar sands applications, aquaculture, industrial fluids and more. Consult factory with flow rates and percentage of solids you are pumping before ordering. © Wastecorp, no reproduction without authorization

4B Series - Trolley Mounted



ACCESSORIES

	Part no.	Description		Part no.	Description
	19022-00	Recommended! Pressure relief valve, bronze set at 40 psi		61315-00	Wheel mount kit with handles
	63166-00	Basic spare parts kit (diaphragm and flappers)		63165-00	Comprehensive spare parts kit (diaphragm, flappers gaskets, weights and hardware)
	60718-00	Non-collapsible EPDM hose 2"x20". Camlocks included		Various	Wet section coatings for specific applications
	51333-10	Discharge hose, lay flat (brown) 2"x50". Camlocks included		62304-00	SEW MoviMot 24V key pad speed control
THE STATE OF THE S	34383-00	Stainer, sq. hole (solids) 2" FNPT	0	61492-00	Starter Control Panel w/ NEMA 12 protection
New York	61387-00	Universal sewer adapter assembly	0	61491-00	Transformer start/estop, w/ Nema 12 overload protection
	60536-00	Clear swing check valve 2" FPTxFPT		62974-00	3-way brass valve w/ aluminum camlocks
	60270-00	Camlock fitting 3" alum. male adapter MNPT	1	60506-00	The Gulper™ Suction tool No more bending
TO L	61813-00	Gauge, 0-160 PSI (air models only)		61755-00	3-pc combo/regulator/ lubricator/filter/ mounting bracket (air models only)
No image available	62534-00	Ball valve 1/4" FNPT (air models only)			