

**FIRE SUPPRESSION
CUBE
FP-275**

FEATURES

MAX. HEAD: 262 FT.

MAX. FLOW: 115 GPM


LIGHT WEIGHT
ALUMINUM SKID

HIGH PRESSURE
PUMP

CAST IRON IMPELLER
& VOLUTE

RED SPRAY NOZZLE
& HOSE REEL

ACCESSORY & HOSE
BIN

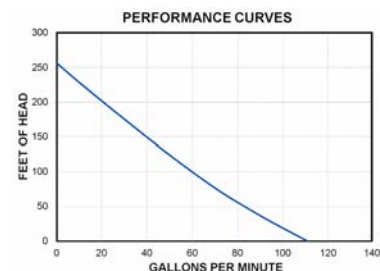

FP SERIES

PROVEN PERFORMANCE.

FIRE SUPPRESSION CUBE SPECIFICATIONS

Model	FP-275
Capacity	275 US Gallon
Max Discharge Head	262 ft. (60 m)
Max Output Flow	115 GPM (79 m ³ /h)
Max Suction Lift	Self Priming 26 ft
Max Pressure	113 Psi
Gas Engine	GX160
Gas Engine	Honda GX160
Engine Displacement	163 cc
Horse Power	5.3 HP
Fuel Tank Capacity	0.82 Gal
Full Load Run Time	2 hrs
Fuel Type	Gasoline
Connection Thread	Outer Pipe Thread (NPT)
Suction, Discharge Size	2 NPT
Pump Housing	Die Cast Aluminum
Impellers & Volutes	Cast Iron
Pump Base	Aluminum
Weight	50 lb
Optional Equipment	Red Swing Fire Hose Reel 5Ltr Jerry Gas Can



• info@wastecorp.com
• 1-888-829-2783

WASTECORP.COM

Note: For information purposes only not to be used for construction. Subject to change without notice. Consult factory for applications exceeding maximum pressure and/or temperature indicated.