

WASTECORP® HONEY WAGONS

HW 325™ Gallon

- Septic Pumping/Containment
- Black/Grey Water Pump Out
- General Wastewater

FEATURES

ELECTRIC OR ENGINE
PUMP MODELS

2" CLEAR SWING
CHECK VALVE

30 FT SUCTION NON-
COLLAPSIBLE EPDM
(GRN/BLK) HOSE

CAMLOCKS INCLUDED

MUD SUCKER PUMP
TECHNOLOGY
STANDARD

SEVERE DUTY AXLE AND
WHEELS

OPTIONAL ACCESSORIES



Shown: HW-300 Series Honey wagon with DOT package and optional equipment. Lockable storage box and dual pulsation dampeners are optional.

CONQUER SEPTIC WASTE AND WASTE OIL PUMPING WITH EASE.

One of our top selling honey wagons is the 325 gallon trailer mounted series. The HW-325 transfers any type of non-explosive liquid including fryer oil, waste trap grease, RV grey water or black water at campgrounds, dirty water, raw sewage and general wastewater. You select from skid mounted or trailer mounted configurations for tough waste pumping jobs.

PROFESSIONAL PUMP SYSTEMS USING MUD SUCKER® TECHNOLOGY - THE WASTECORP ADVANTAGE.



BASE MOUNTED

If a stationary waste containment system is more appropriate for your application you have the option of selecting from a variety of mounting configurations. Just tell us what you're using it for (truck bed installation, cube van mounting, etc).



PREMIUM COMPONENTS

Your honey wagon investment is backed by top industry rated components and standard spill proof attachments. Plus your pump out ships with application specific components at no extra charge.



ITS ALL ABOUT THE DESIGN

No detail gets overlooked in the production of your honey wagon. Our premium galvanized trailers are designed to resist corrosion with diamond plate decking on all -DT models.

WASTECORP® HONEY WAGONS

HW 325™ Gallon

- Septic Pumping/Containment
- Black/Grey Water Pump Out
- General Wastewater



325 US gallon polyethylene waste tank


Premium hose rack

Premium non-collapsible hosing

Exclusive Mud Sucker pump technology manufactured by Wastecorp standard.

Heavy duty galvanized DOT compliant single axle trailer

Standard pulsation dampener for pumping thin liquids

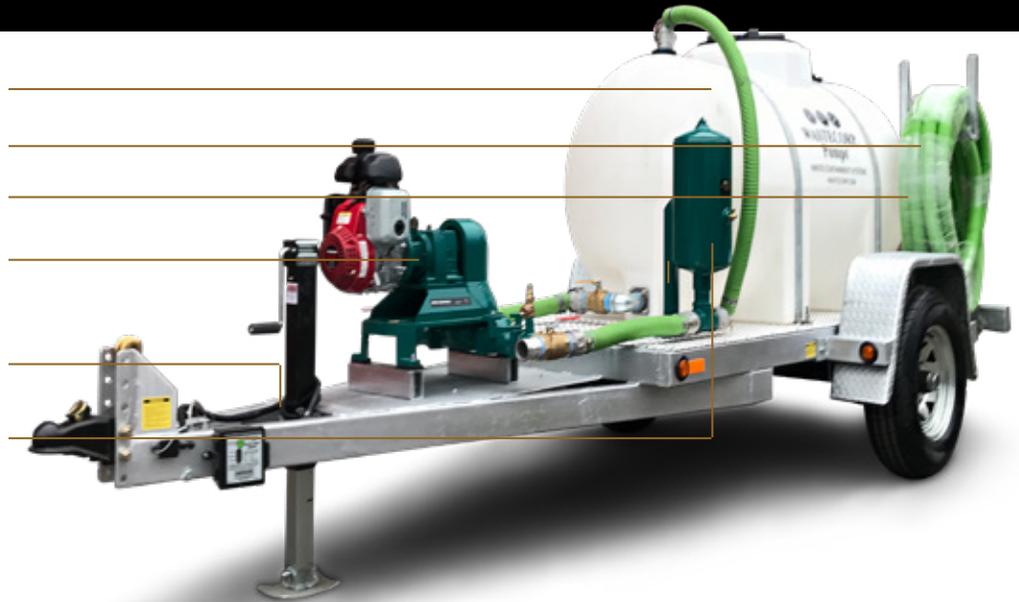

PUMP OUT INSPIRATION GALLERY



Campground/Recreational



Industrial Waste Containment



Marine Pump Out



Waste Oil Collection and Containment System



Bilge Waste Pump Out Commercial Marine

Performance Range

	2" Pump	3" Pump
Max. capacity	18 GPM	80 GPM
Max. suction lift	20' vertical or 75' horizontal	20' vertical or 75' horizontal
Max. discharge head	50' vertical or 300' horizontal	50' vertical or 300' horizontal
Solids handling	1½" dia or 50% by volume	2.25" dia or 50% by volume

Pump and Motor Specifications

	2" Pump	3" Pump
Suction inlet/outlet size	1.5" or 2"	3"
Max. liquid temperature	140° F (60° C) continuous	140° F (60° C) continuous
Pump body casing	Aluminum	Aluminum
Diaphragm	7" dia. fabric reinforced Buna-N	13" dia. thermoplastic elastomer (Santoprene)
Flapper valves	Fabric reinforced Viton	Reinforced HNBR
Crank arm	Steel	Steel
Bearing	Cam follower	Cam follower
Check valve seat	Aluminum	Aluminum
Pump rod	Steel	Steel
Gaskets	Neo-nylon	HNBR (Integral)
Inlet/outlet flanges	Aluminum	Aluminum
Lubrication	Alemite grease fitting	Alemite grease fitting
Gearbox	SEW Eurodrive or Siemens	SEW Eurodrive or Siemens
Motor specification (standard)	1 hp, 1800 RPM, 3 phase-60 Hz 230/460V	3HP; 3Ph; 60Hz; 230-460V [or 360-575V]; 1800RPM
Optional drive systems (specify at time of order)	Gas, diesel, explosion proof, DC, air and hydraulic	Gas, diesel, explosion proof, DC, air and hydraulic

Trailer Specifications

Hitch Connection	2" ball or 3" pintle hook
GVWR	Single, 5200 lb axle
Brakes	Electric
Lighting	LED

HW 325™ Gallon

- Septic Pumping/Containment
- Black/Grey Water Pump Out
- General Wastewater

Approximate Dimensions

