WASTECORP Pumps®


SLUDGE PRO®
DISC PUMPS
3SDWP-SS™

BENEFITS

- TRANSFER FROM 0-84 GPM
- MAX. HEAD TO 184' (80 PSI)
- NO REGULAR MAINTENANCE REQUIRED
- TWO YEAR LIMITED WARRANTY*
- IDEAL FOR ABRASIVE, VISCOUS AND SHEAR SENSITIVE MEDIA
- RUNS DRY = NO DAMAGE
- SELF PRIMING PUMP
- HIGHER OPERATING PRESSURE
- NEXT GENERATION DISC PUMP TECHNOLOGY

*Contact factory for warranty details.

WASTECORP.COM

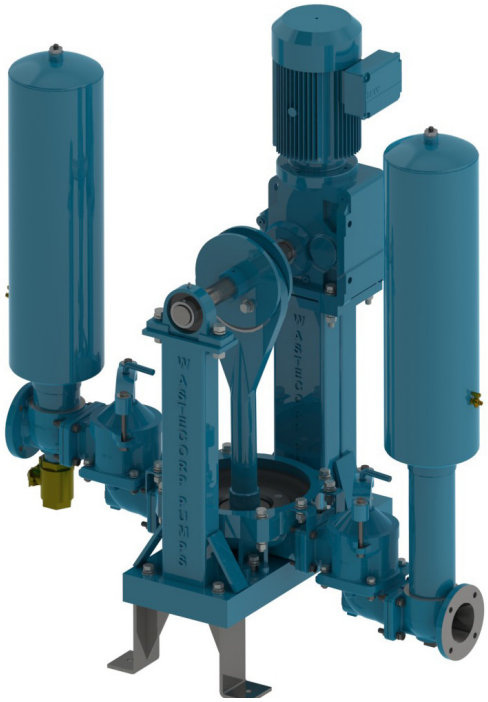

BALL VALVE
SPACE SAVER
SOLIDS MANAGEMENT TECHNOLOGY

Patent Pending

THE WAIT IS OVER FOR A MORE ADVANCED DISC PUMP.

Sludge Pro® disc pumps are designed for a wide range of slurry and sludge process applications for the municipal, industrial, chemical and food processing industries. These durable leak-free pumps are self priming and can run dry without damage for uncompromising pumping reliability. Select from standard direct drive, belt driven, air, hydraulic and engine driven systems.

SLUDGE PRO® 3SDWP - DISC PUMPS



Advanced Disc Pump Technology


- Seal-less, glandless & leak free design
- OSHA compliant Guard
- Over six models to select from



Innovative Trunnion Options

Not all pumping applications are alike, that's why Wastecorp offers you the right elastomer for your application including:

- Santoprene®
- Buna-N®
- Viton®
- Teflo ®
- Nordel®
- Neoprene



Pressure Sensor Assembly

Provides safe protection against dead heading, closed valves or other discharge blockages that can damage the pump. Also permits direct charging of pulsation dampener and access for cleaning.


rev August 28 2019

WASTECORP Pumps SLUDGE PRO®

DISC PUMPS

WASTECORP Pumps®

CUT AWAY

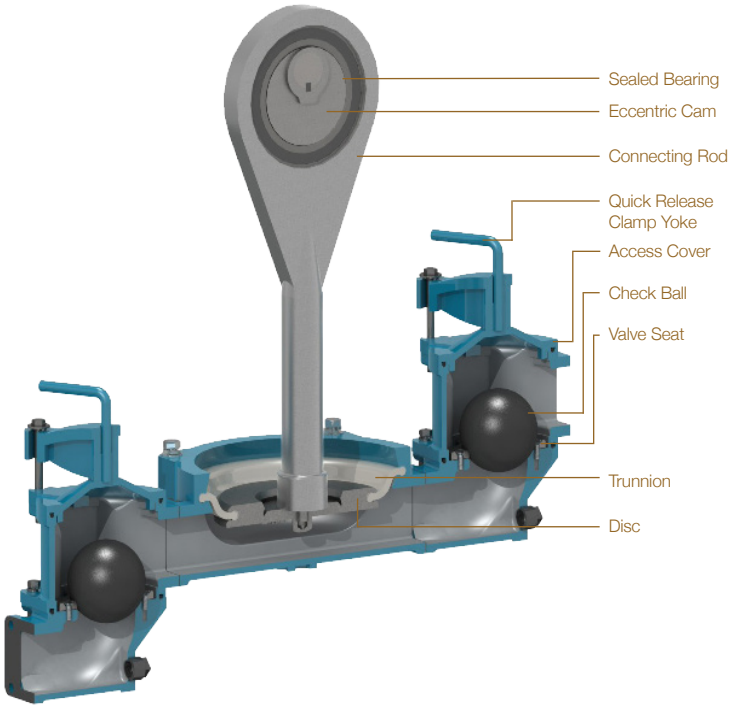

TECHNICAL SPECIFICATIONS

Model	Sludge Pro® 3SDWP
Connection Size	3" 150# Flanged
Typical Flow Range	0-84 GPM
Solids Handling	Max 1¾"
Displacement	0.76 gal/rev
Max. Suction Lift	25'
Max. Discharge Head	184' (80 psi) (5.1 bar)
Max. Liquid Temp.	350°F (176°C)
Operating Speed	up to 110 RPM

MATERIALS OF CONSTRUCTION

	Standard	Optional
Trunnion	**Neoprene** (TPE) 0°F to 200°F	**Santoprene** -40°F to +225°F **Buna-N®** +10°F to +180°F **Viton®** -40°F to +350°F **Teflon®** (PTFE) +40°F to +220°F **Nordel®** -60°F to +280°F
Discs	Ductile Iron, ASTM A 536, Grade 65-45-12	
Ball Valve	Urethane	Teflo ®
Sectionalized Construction	Cast Iron ASTM A48 Class 30	See Coating Options Below
Eccentric Cam	Ductile iron ASTM A 536, Grade 65-45-12	
Drive Shaft	400 Series SS	
Connecting Rod	Ductile iron ASTM A 536, Grade 65-45-12	
Base Frame	Heavy Duty Fabricated Steel	304SS, Galvanized Steel, 316 SS

DRIVE SYSTEM OPTIONS

Direct Dive	Electric Motor
Optional	Air, hydraulic, belt driven
Engine Driven	Gas or diesel

Note: Consult factory for applications exceeding maximum pressure and/or temperature indicated.

WETTED CASTING COATING OPTIONS


Xylan, ETFE / PTFE, Dura-S, Nitrile, Neoprene, Nordel, Viton, Hypalon

Sludge Pro Pumps are designed, engineered and manufactured in by Wastecorp Pumps in North America. Country/region specific models are available worldwide.
Dimensions and weight are approximate. Wastecorp Pumps reserves the right to make changes in design, materials and operating ranges without notice.


WASTECORP Pumps | SLUDGE PRO® DISC PUMPS

WASTECORP Pumps®


APPROXIMATE PUMP DIMENSIONS

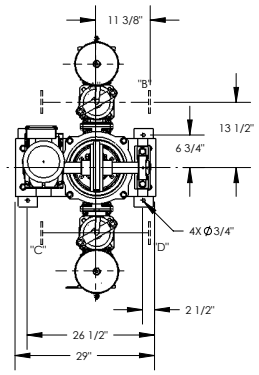


PLAN VIEW

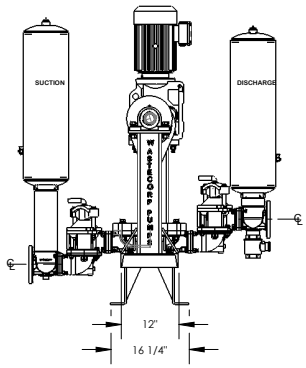

LEFT HAND ASSEMBLY

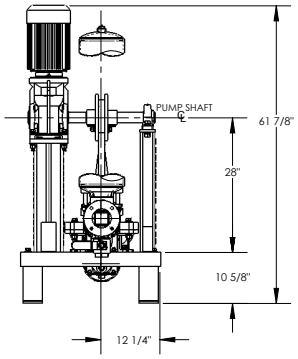



SIDE ELEVATION VIEW

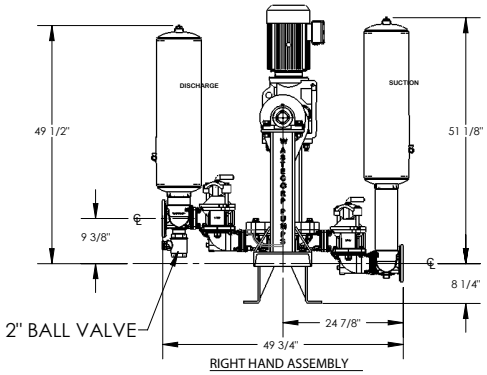

RIGHT HAND ASSEMBLY

PUMP CURVE

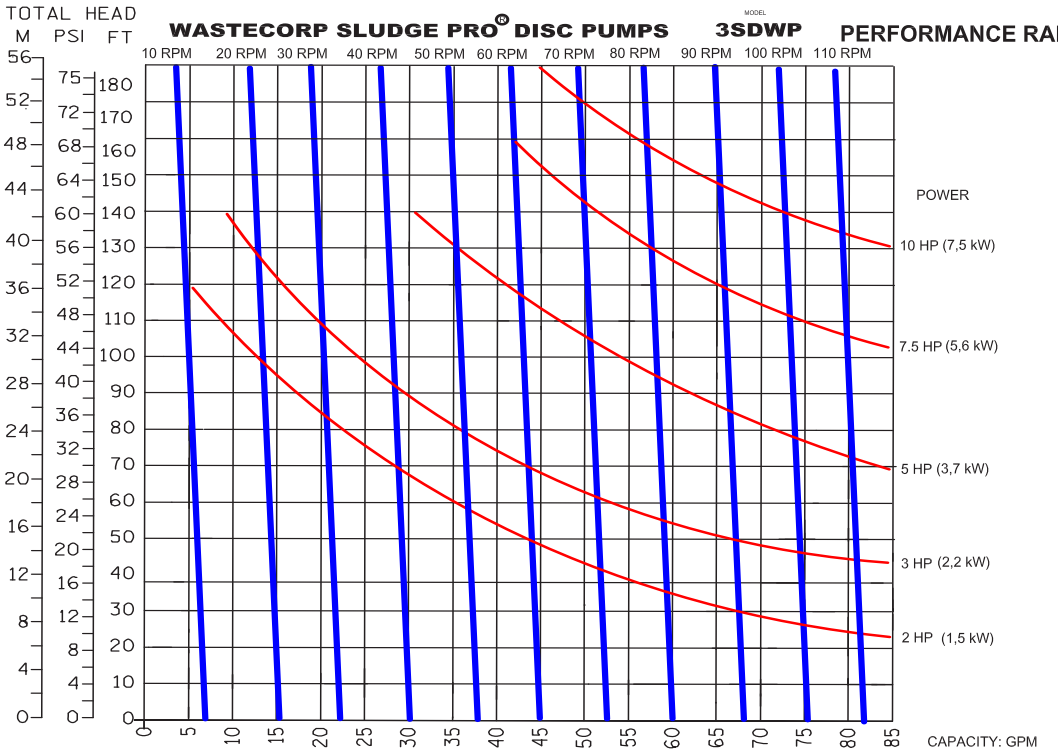


ISO ELEVATION VIEW

SUCTION LIFTS

Dry Prime Static Suction Lift: 25' (7.62m)

Wet Prime: 25" Hg 28.4' (8.6m)

CURVE NO.: 63908-00 MODEL: 3SDWP

SIZE: 3" x 3" RPM: VARIOUS

SP. GR.:1.0 @ 68°F

Displacement Per Stroke: 0.76 Gal/Revolution

WASTECORP Pumps®
WASTECORP.COM

USA
Wastecorp Pumps Systems Inc
1795 Baseline Road
Grand Island, New York 14072 | USA
Tel: 888.829.2783 | Fax: 888-883-3320
sales@wastecorp.com

Canada
Wastecorp Pumps Inc.
50 Shorncliffe Road
Toronto, Ontario M8Z 5K1 | Canada
Tel: 416.233.3000 | Fax: 416.233.2300
info@wastecorp.com

* Try Before You Buy promotion is subject to program terms. Contact a Wastecorp representative for program details.

Sludge Pro, Wastecorp and logo are trademarks of WPCI and protected by international and domestic copyrights. © Wastecorp 2015. All Rights Reserved.