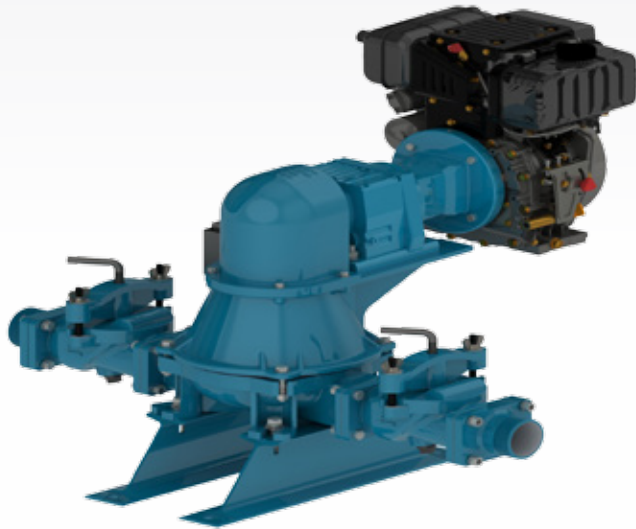


Wastecorp Mud Sucker® 3FAC-M™ Series

NEW!


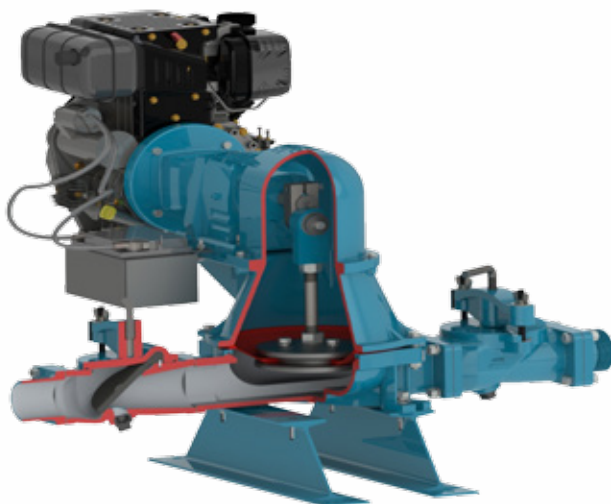
Performance Range

| | |
|---------------------|---------------------------------|
| Max. capacity | 80 GPM |
| Max. suction lift | 20' vertical or 75' horizontal |
| Max. discharge head | 50' vertical or 300' horizontal |
| Solids handling | 2¼" dia or 50% by volume |

Pump Specifications

| | |
|---------------------------|------------------------------------|
| Suction inlet/outlet size | 3"x3" (female threaded) |
| Max. liquid temperature | 140°F (60°C) continuous* |
| Pump body casing | Cast Iron |
| Diaphragm | 13" OD TPE Santoprene® severe duty |
| Check valves | EPDM |
| Gear reducer | SEW Eurodrive/Siemens |
| Crankarm | AISI 1045 HR steel |
| Pump rod | AISI 12L14 carbon steel |
| Pump operating speed | 60 RPM |

3FAC-M™ Cutaway



Applications

- Professional grade applications
- Operating cycles beyond 4 hours per day
- Government, industrial, commercial

Benefits

- Cast iron pump body
- Advanced flapper technology system
- Inspect suction and discharge area in minutes

3FAC-M™ Series Model Selection

| Model | Part no. |
|---|----------|
| 6.5 hp Honda gas engine w/gear reducer (e-start) | 64994-20 |
| 6.5 hp Kohler/Yanmar LV diesel engine with gear reducer (e-start) | 64994-30 |

3FAC-M™ Accessories

| Description | Part no. |
|--|----------|
| Hose, non-collapsible, EPDM rubber, 3"x20'. Camlocks included. | 60723-00 |
| Hose, discharge, lay flat, brown, 3"x50'. | 51334-10 |
| Male camlock, 3" | 60270-00 |
| Professional Wagon kit, 16" pneumatic tires | 64658-10 |
| Air chamber (discharge side). Pulsation dampening | 64970-00 |

Spare Parts Kits

| Description | Part no. |
|-------------------------------|----------|
| Basic spare parts kit | 65065-00 |
| Comprehensive spare parts kit | 65064-00 |

* Tested based on pumping water. Fluid handling rate may be impacted by quantity of elbows in the system, thickness of fluid, altitude and other factors. Locate pump as close to pumping source as possible.