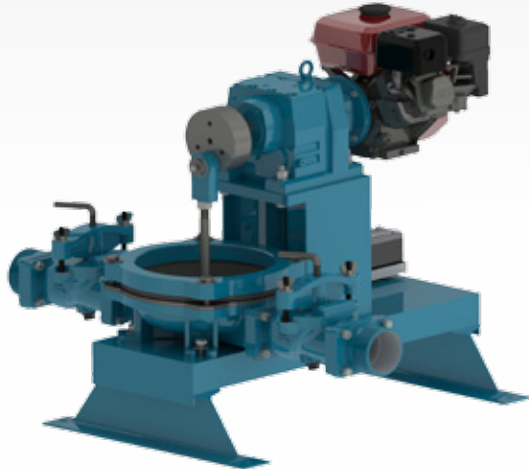


Wastecorp Mud Sucker® 4FAC-M™ Series

NEW!


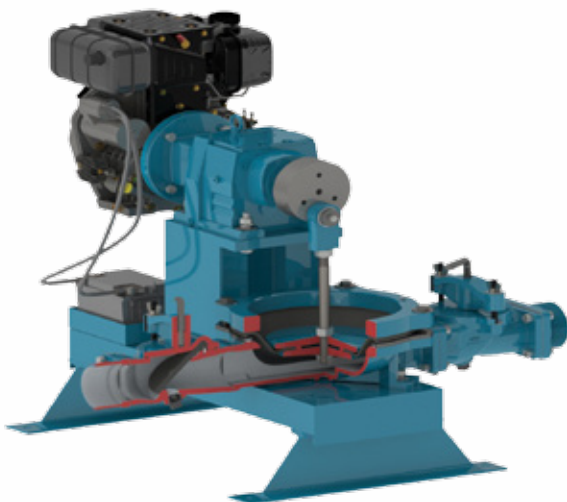
Performance Range

Max. capacity	110 GPM
Max. suction lift	20' vertical or 75' horizontal
Max. discharge head	50' vertical or 300' horizontal
Solids handling	2¼" dia or 50% by volume

Pump Specifications

Suction inlet/outlet size	4"x4" MNPT (optional camlock or ANSI flange)
Max. liquid temperature	140°F (60°C) continuous*
Pump body casing	Cast iron ASTM A48
Diaphragm	14¾" OD TPE Santoprene®
Check valves	EPDM
Gear reducer	SEW Eurodrive/Siemens
Drive hub	AISI 12L14 carbon steel
Pump rod	AISI 12L14 carbon steel
Pump operating speed	70 RPM

4FAC-M™ Cutaway



Applications

- Heavy duty pumping applications including industrial, oil sludge, municipal wastewater.
- Most higher solids transfer applications.

Benefits

- 4" connection
- Cast iron pump body
- Advanced flapper technology system
- Inspect suction and discharge area in minutes

4FAC-M™ Series Model Selection

Model	Part no.
9 hp Honda gas engine w/gear reducer (e-start)	64751-00
9 hp Kohler diesel engine (e-start)	64751-10

4FAC-M™ Accessories

Description	Part no.
Camlock, 4" male	64093-02
Hose, non-collapsible, EPDM rubber, 3"x20'. Camlocks included.	60723-00
Hose, discharge, lay flat, brown, 3"x50'.	51334-10
Professional wagon kit, 16" pneumatic tires	61292-00
Air chamber with FNPT TEE	65211-00
Air chamber with ANSI manifold	63948-00
Strainer, 4" sq. hole	31760-00

Spare Parts Kits

Description	Part no.
Basic spare parts kit	65213-00
Comprehensive spare parts kit	65212-00