WASTECORP. Pumps®

SLUDGE PRO®
TRIPLEX DISC PUMPS
6TDWP™


BENEFITS

- TRANSFER FROM 0-375 GPM
- MAX. HEAD TO 184' (80 PSI)
- NO REGULAR MAINTENANCE REQUIRED
- TWO YEAR LIMITED WARRANTY*
- IDEAL FOR ABRASIVE, VISCOUS AND SHEAR SENSITIVE MEDIA
- RUNS DRY = NO DAMAGE
- SELF PRIMING PUMP
- HIGHER OPERATING PRESSURE
- NEXT GENERATION DISC PUMP TECHNOLOGY

*Contact factory for warranty details.

WASTECORP.COM

BALL VALVE
SOLIDS MANAGEMENT TECHNOLOGY

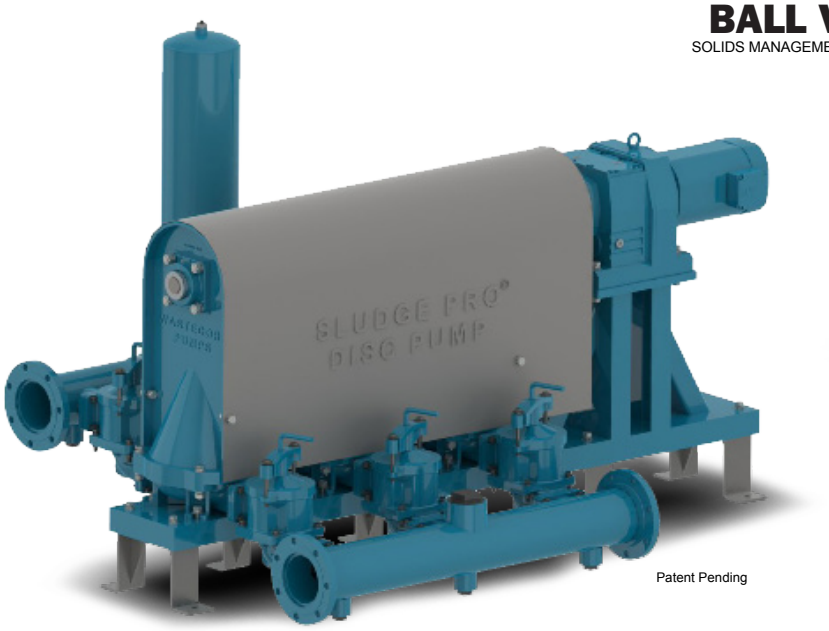


Patent Pending

TAKING HIGHER CAPACITY DISC PUMP TECHNOLOGY TO THE NEXT LEVEL.

Sludge Pro® disc pumps are designed for a wide range of slurry and sludge process applications for the municipal, industrial, chemical and food processing industries. These durable leak-free pumps are self priming and can run dry without damage for uncompromising pumping reliability. Select from standard direct drive, belt driven, air, hydraulic and engine drive systems.

SLUDGE PRO® 6TDWP - TRIPLEX DISC PUMPS

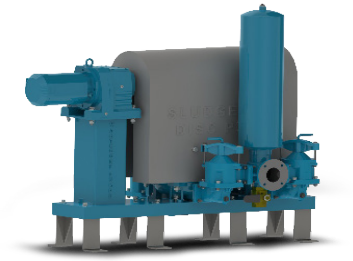

Advanced Disc Pump Technology


- Seal-less, glandless & leak free design
- OSHA compliant guard
- Over six models to select from



Innovative Trunnion Options

Not all pumping applications are alike, that's why Wastecorp offers you the right elastomer for your application including:

- Santoprene®
- Buna-N®
- Viton®
- Teflo ®
- Nordel®
- Neoprene



Pressure Sensor Assembly

Provides safe protection against dead heading, closed valves or other discharge blockages that can damage the pump. Also permits direct charging of pulsation dampener and access for cleaning.


rev May 9 2019

WASTECORP. Pumps SLUDGE PRO®


DISC PUMPS

WASTECORP. Pumps®

CUT AWAY

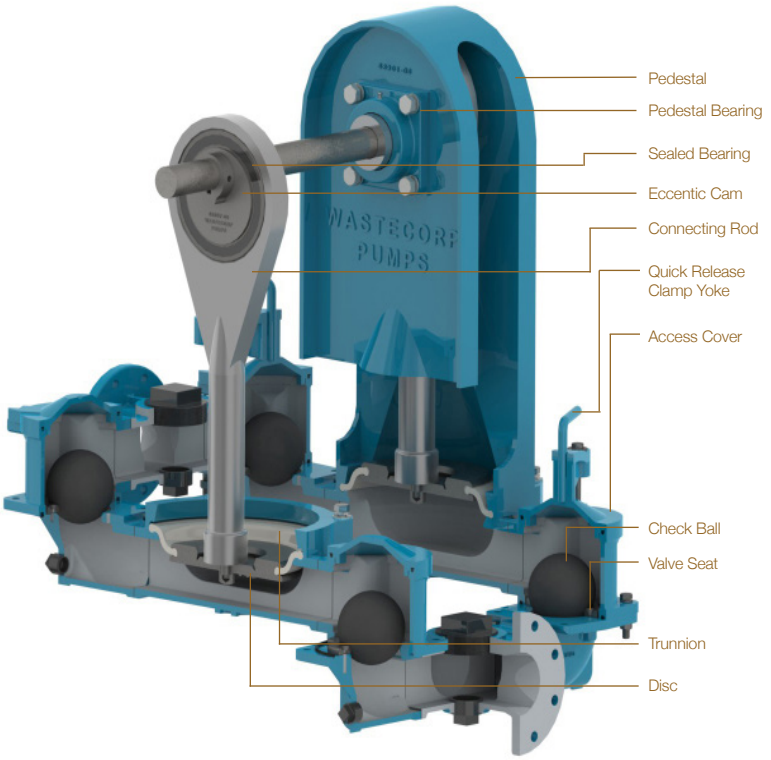

APPROXIMATE PUMP DIMENSIONS

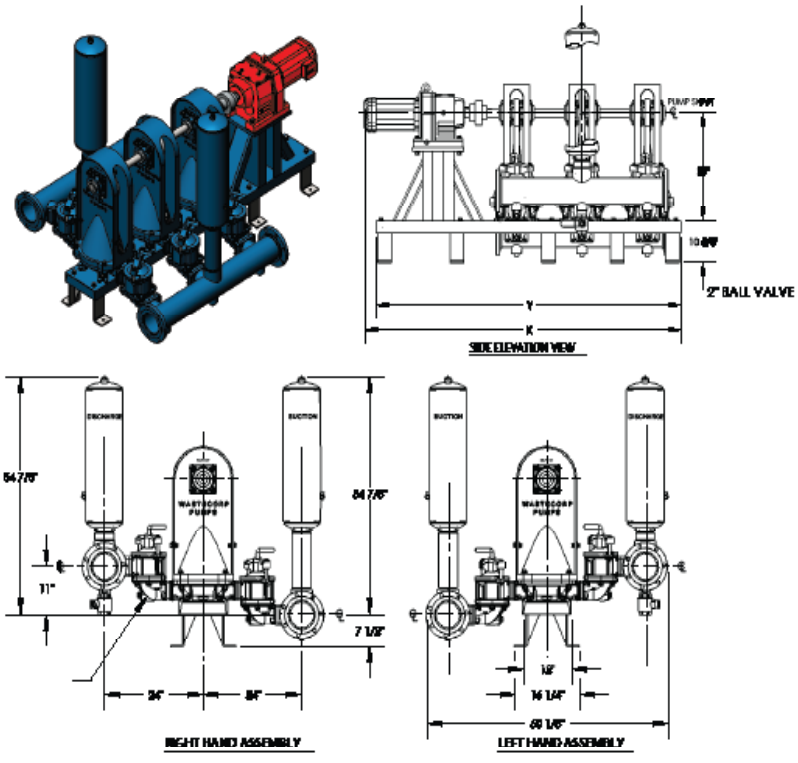

TECHNICAL SPECIFICATIONS

Model	Sludge Pro® 6TDWP
Connection Size	6" 150# Flanged
Typical Flow Range	0-375 GPM
Solids Handling	Max 1¾"
Displacement	3.46 gal/rev
Max. Suction Lift	25'
Max. Discharge Head	184' (80 psi) (5.1 bar)
Max. Liquid Temp.	350°F (176°C)
Operating Speed	up to 110 RPM

MATERIALS OF CONSTRUCTION

	Standard	Optional
Trunnion	**Neoprene** (TPE) 0°F to 200°F	**Santoprene** -40°F to +225°F **Buna-N®** +10°F to +180°F **Viton®** -40°F to +350°F **Teflon®** (PTFE) +40°F to +220°F **Nordel®** -60°F to +280°F
Discs	Ductile Iron, ASTM A 536, Grade 65-45-12	
Ball Valve	Urethane	Teflo ®
Sectionalized Construction	Cast Iron ASTM A48 Class 30	See Coating Options Below
Pedestal	Ductile iron ASTM A 536, Grade 65-45-12	
Eccentric Cam	Ductile iron ASTM A 536, Grade 65-45-12	
Drive Shaft	400 Series SS	
Connecting Rod	Ductile iron ASTM A 536, Grade 65-45-12	
Base Frame	Heavy Duty Fabricated Steel	304SS, Galvanized Steel, 316 SS

DRIVE SYSTEM OPTIONS

Direct Dive	Electric Motor
Optional	Air, hydraulic, belt driven
Engine Driven	Gas or diesel

Note: Consult factory for applications exceeding maximum pressure and/or temperature indicated.

WETTED CASTING COATING OPTIONS

Xylan, ETFE / PTFE, Dura-S, Nitrile, Neoprene, Nordel, Viton, Hypalon


Sludge Pro Pumps are designed, engineered and manufactured in by Wastecorp Pumps in North America. Country/region specific models are available worldwide.

Dimensions and weight are approximate. Wastecorp Pumps reserves the right to make changes in design, materials and operating ranges without notice.

WASTECORP. Pumps SLUDGE PRO® DISC PUMPS

WASTECORP. Pumps®

PUMP CURVE

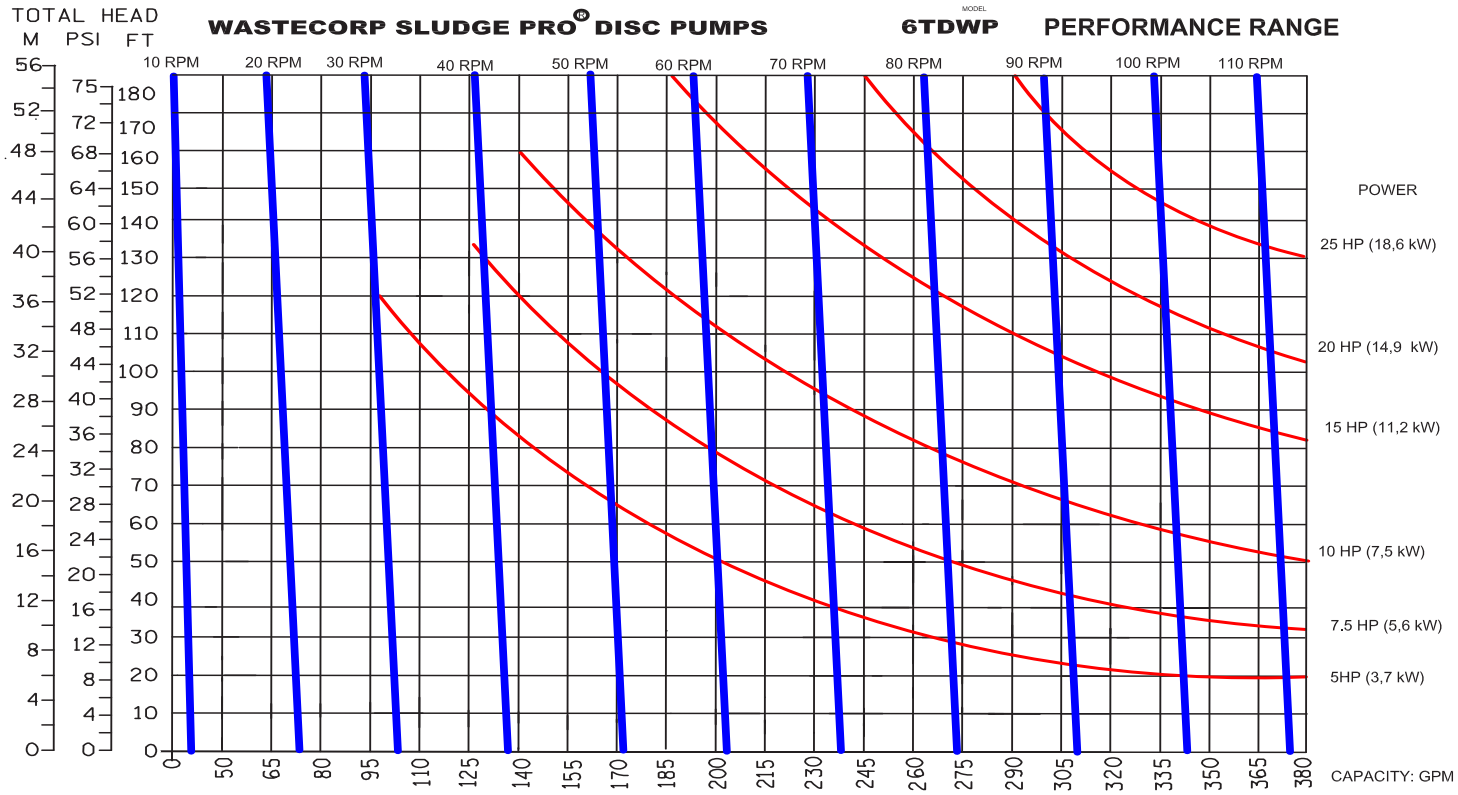

SUCTION LIFTS

Dry Prime Static Suction Lift: 25' (7.62m)

Wet Prime: 25" Hg 28.4' (8.6m)

CURVE NO.: 64171-00 MODEL: 6TDWP

PIPE SIZE: 6" x 6" RPM: VARIOUS

SP. GR.:1.0 @ 68°F Displacement: 3.46 Gal/Revolution

Sludge Pro ® and Wastecorp® are registered trademark of Wastecorp (WPCI).
Specifications and illustrations are subject to revision without notice. Wastecorp is not liable for any incompleteness or inaccuracies.
Wastecorp is not liable for any consequential, incidental or indirect damages relating to these specifications or their use.

Curve based on water (specific gravity = 1.0), with 10 foot static lift.
The performance curve shown were taken from actual tests of standard production pumps, and reflect an average performance of the pump indicated.

REV. DS 4/2015

WASTECORP. Pumps®
WASTECORP.COM

USA
Wastecorp Pumps Systems Inc
1795 Baseline Road
Grand Island, New York 14072 | USA
Tel: 888.829.2783 | Fax: 888-883-3320
sales@wastecorp.com

Canada
Wastecorp Pumps Inc.
50 Shorncliffe Road
Toronto, Ontario M8Z 5K1 | Canada
Tel: 416.233.3000 | Fax: 416.233.2300
info@wastecorp.com

Sludge Pro, Wastecorp and logo are trademarks of WPCI and protected by international and domestic copyrights. © Wastecorp 2015. All Rights Reserved.
* Try Before You Buy promotion is subject to program terms and conditions and does not include freight costs to and from your facility. Contact a Wastecorp representative for program details.