







**2025 WASTECORP HONEY WAGON BROCHURE
WASTE CONTAINMENT SYSTEMS**

Wastecorp Honey Wagon - Range Overview

OVERVIEW	PRODUCT	TECHNICAL SPECIFICATIONS	PAGE										
<ul style="list-style-type: none"> ■ Designed for self service marinas, boat owners and RV's ■ Maneuvers easily in tight spaces ■ Features the heavy duty Sludge Sucker® hand pump series 	<p style="text-align: center;">Pump Out Caddy</p> 	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">Tank size</td> <td style="width: 50%;">25 gallon</td> </tr> <tr> <td>Trailer/frame</td> <td>Caddy w/handles</td> </tr> <tr> <td>Max. suction lift</td> <td>15'</td> </tr> <tr> <td>Max. discharge head</td> <td>15'</td> </tr> <tr> <td>Connection size</td> <td>1"-1½"</td> </tr> </table>	Tank size	25 gallon	Trailer/frame	Caddy w/handles	Max. suction lift	15'	Max. discharge head	15'	Connection size	1"-1½"	8
Tank size	25 gallon												
Trailer/frame	Caddy w/handles												
Max. suction lift	15'												
Max. discharge head	15'												
Connection size	1"-1½"												
<ul style="list-style-type: none"> ■ Small-medium pump out applications ■ Exclusive three way valve system to pump liquid either into or out of the tank with one pump ■ Features the heavy duty Mud Sucker® FA series with gas, electric diesel and models available 	<p style="text-align: center;">HW-50</p> 	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">Tank size</td> <td style="width: 50%;">50 gallon</td> </tr> <tr> <td>Trailer/frame</td> <td>Stationary, ATV trailer, Utility</td> </tr> <tr> <td>Max. suction lift</td> <td>20' v/75' h</td> </tr> <tr> <td>Max. discharge head</td> <td>50' v /300' h</td> </tr> <tr> <td>Connection size</td> <td>1½" or 2"</td> </tr> </table>	Tank size	50 gallon	Trailer/frame	Stationary, ATV trailer, Utility	Max. suction lift	20' v/75' h	Max. discharge head	50' v /300' h	Connection size	1½" or 2"	9
Tank size	50 gallon												
Trailer/frame	Stationary, ATV trailer, Utility												
Max. suction lift	20' v/75' h												
Max. discharge head	50' v /300' h												
Connection size	1½" or 2"												
<ul style="list-style-type: none"> ■ Medium duty pump out applications ■ Connects to utility vehicles like the John Deere Gator® and Bobcat® ■ Special packages available for train station/locomotive applications, golf courses and more 	<p style="text-align: center;">HW-100-200</p> 	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">Tank sizes</td> <td style="width: 50%;">100-200 gallon</td> </tr> <tr> <td>Trailer/frame</td> <td>Trolley/utility style</td> </tr> <tr> <td>Max. suction lift</td> <td>20' v/75' h</td> </tr> <tr> <td>Max. discharge head</td> <td>50' v /300' h</td> </tr> <tr> <td>Connection size</td> <td>1½" or 2"</td> </tr> </table>	Tank sizes	100-200 gallon	Trailer/frame	Trolley/utility style	Max. suction lift	20' v/75' h	Max. discharge head	50' v /300' h	Connection size	1½" or 2"	10
Tank sizes	100-200 gallon												
Trailer/frame	Trolley/utility style												
Max. suction lift	20' v/75' h												
Max. discharge head	50' v /300' h												
Connection size	1½" or 2"												
<ul style="list-style-type: none"> ■ Great size for many medium-heavy duty pump outs ■ Step deck for easy system inspection ■ Premium hose system and components for high demand applications 	<p style="text-align: center;">HW-300</p> 	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">Tank size</td> <td style="width: 50%;">325 gallons</td> </tr> <tr> <td>Trailer/frame</td> <td>Stationary, utility trailer or DOT approved</td> </tr> <tr> <td>Max. suction lift</td> <td>20' v/75' h</td> </tr> <tr> <td>Max. discharge head</td> <td>50' v /300' h</td> </tr> <tr> <td>Connection size</td> <td>1½", 2" or 3"</td> </tr> </table>	Tank size	325 gallons	Trailer/frame	Stationary, utility trailer or DOT approved	Max. suction lift	20' v/75' h	Max. discharge head	50' v /300' h	Connection size	1½", 2" or 3"	11
Tank size	325 gallons												
Trailer/frame	Stationary, utility trailer or DOT approved												
Max. suction lift	20' v/75' h												
Max. discharge head	50' v /300' h												
Connection size	1½", 2" or 3"												
<ul style="list-style-type: none"> ■ Designed with versatile mounting options for pump out vessels, customer enclosed facilities ■ Heavy duty frame and cradle ■ Wastewater, septic, waste oil and general waste containment needs 	<p style="text-align: center;">HW-500</p> 	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">Tank size</td> <td style="width: 50%;">525 gallons</td> </tr> <tr> <td>Trailer/frame</td> <td>Stationary, utility trailer or DOT approved</td> </tr> <tr> <td>Max. suction lift</td> <td>20' v/75' h</td> </tr> <tr> <td>Max. discharge head</td> <td>50' v /300' h</td> </tr> <tr> <td>Connection size</td> <td>1½", 2" or 3"</td> </tr> </table>	Tank size	525 gallons	Trailer/frame	Stationary, utility trailer or DOT approved	Max. suction lift	20' v/75' h	Max. discharge head	50' v /300' h	Connection size	1½", 2" or 3"	16
Tank size	525 gallons												
Trailer/frame	Stationary, utility trailer or DOT approved												
Max. suction lift	20' v/75' h												
Max. discharge head	50' v /300' h												
Connection size	1½", 2" or 3"												

OVERVIEW	PRODUCT	TECHNICAL SPECIFICATIONS	PAGE												
<ul style="list-style-type: none"> ■ Designed for heavy duty containment of septic waste, wastewater and oil ■ Rear discharge with premium brass fittings ■ Galvanized deck and frame for the ultimate in corrosion resistance 	<p>HW-1000</p> 	<table border="1"> <tr> <td>Tank size</td> <td>1025/1035 gallons</td> </tr> <tr> <td>Trailer/frame</td> <td>Tandem axle/heavy duty</td> </tr> <tr> <td>Max. suction lift</td> <td>20' v/75' h</td> </tr> <tr> <td>Max. discharge head</td> <td>50' v /300' h</td> </tr> <tr> <td>Connection size</td> <td>1½", 2" or 3"</td> </tr> </table>	Tank size	1025/1035 gallons	Trailer/frame	Tandem axle/heavy duty	Max. suction lift	20' v/75' h	Max. discharge head	50' v /300' h	Connection size	1½", 2" or 3"	<p>17</p>		
Tank size	1025/1035 gallons														
Trailer/frame	Tandem axle/heavy duty														
Max. suction lift	20' v/75' h														
Max. discharge head	50' v /300' h														
Connection size	1½", 2" or 3"														
<ul style="list-style-type: none"> ■ Triple axle DOT approved trailer for the ultimate in stability ■ Standard hose bin ■ Electric brakes, lighting package, choice of pump and configuration options 	<p>HW 1600</p> 	<table border="1"> <tr> <td>Tank size</td> <td>1635 gallons</td> </tr> <tr> <td>Trailer/frame</td> <td>Triple axle w/heavy duty</td> </tr> <tr> <td>Max. suction lift</td> <td>20' v/75' h</td> </tr> <tr> <td>Max. discharge head</td> <td>50' v /300' h</td> </tr> <tr> <td>Connection size</td> <td>1½", 2" or 3"</td> </tr> </table>	Tank size	1635 gallons	Trailer/frame	Triple axle w/heavy duty	Max. suction lift	20' v/75' h	Max. discharge head	50' v /300' h	Connection size	1½", 2" or 3"	<p>18</p>		
Tank size	1635 gallons														
Trailer/frame	Triple axle w/heavy duty														
Max. suction lift	20' v/75' h														
Max. discharge head	50' v /300' h														
Connection size	1½", 2" or 3"														
<ul style="list-style-type: none"> ■ Dually axle with pintle hook and goose neck trailer available ■ Rear discharge with premium brass fittings ■ Configure with any Mud Sucker brand diaphragm pump 	<p>HW 2000-5000</p> 	<table border="1"> <tr> <td>Tank sizes</td> <td>2035-5025 gallons</td> </tr> <tr> <td>Trailer/frame</td> <td>Varies</td> </tr> <tr> <td>Max. suction lift</td> <td>20' v/75' h</td> </tr> <tr> <td>Max. discharge head</td> <td>50' v /300' h</td> </tr> <tr> <td>Connection size</td> <td>1½", 2" or 3"</td> </tr> </table>	Tank sizes	2035-5025 gallons	Trailer/frame	Varies	Max. suction lift	20' v/75' h	Max. discharge head	50' v /300' h	Connection size	1½", 2" or 3"	<p>19</p>		
Tank sizes	2035-5025 gallons														
Trailer/frame	Varies														
Max. suction lift	20' v/75' h														
Max. discharge head	50' v /300' h														
Connection size	1½", 2" or 3"														
<ul style="list-style-type: none"> ■ Waste tank and water tank ■ Dual pump system ■ You select the tank size combination for your job 	<p>Dual Tank Waste+Water</p> 	<table border="1"> <tr> <td>Waste tank sizes</td> <td>150-725 gallons</td> </tr> <tr> <td>Rinse tank sizes</td> <td>Up to 300 gallons</td> </tr> <tr> <td>Trailer/frame</td> <td>Stationary, utility or DOT rated</td> </tr> <tr> <td>Max. suction lift</td> <td>20' v/75' h</td> </tr> <tr> <td>Max. discharge head</td> <td>50' v /300' h</td> </tr> <tr> <td>Connection size</td> <td>1½", 2" or 3"</td> </tr> </table>	Waste tank sizes	150-725 gallons	Rinse tank sizes	Up to 300 gallons	Trailer/frame	Stationary, utility or DOT rated	Max. suction lift	20' v/75' h	Max. discharge head	50' v /300' h	Connection size	1½", 2" or 3"	<p>20</p>
Waste tank sizes	150-725 gallons														
Rinse tank sizes	Up to 300 gallons														
Trailer/frame	Stationary, utility or DOT rated														
Max. suction lift	20' v/75' h														
Max. discharge head	50' v /300' h														
Connection size	1½", 2" or 3"														

YOUR WASTE CONTAINMENT SYSTEM. AS EASY AS 1-2-3.

With a Wastecorp waste containment system you get to build and price your system to suit your needs. Start with the pump, the mounting, the types of tires, tank and accessories and you're done.

SELECT YOUR MOUNTING.



DOT Compliant



Off Road Trailer



ATV/Trolley Mount



Stationary

SELECT YOUR PUMP.



1.5"-2" Connection
Up to 20 GPM



3" Connection
Up to 80 GPM



4" Connection
Up to 110 GPM

SELECT YOUR TANK.



Waste Tank Only
25-5000+ Gallons



Water + Waste Tank
Various Combos



SO MANY USES. SO MANY WAYS YOU BENEFIT.

There are so many ways you can use your Wastecorp waste containment system. From septic pumping, waste oil recovery and temporary storage to pumping out wastewater from flooded areas, you get the ultimate in quality and performance. Select from 25 to over 500 gallon tank sizes and the mounting of your choice.



Shown HW-300 Series with Honda gas engine

WASTE CONTAINMENT SYSTEMS BUILT FOR PROFESSIONALS, BY PROFESSIONALS.




HEAVY DUTY POLYETHYLENE TANKS

Provide superior durability with access ports that conform to your needs. With Wastecorp honey wagons, use either the pump or the gravity port to empty the tank quickly and easily.

THREE WAY VALVE SYSTEM

Wastecorp's exclusive three way valve design enables you to pump wastewater into the honey wagon tank and extract it with the same pump. Simply turn the lever to pump in or out.

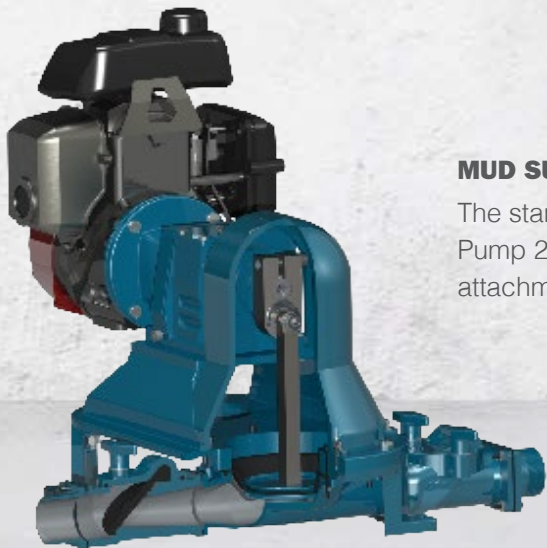


MUD SUCKER DIAPHRAGM PUMP TECHNOLOGY

The standard model features your choice of the Mud Sucker Diaphragm Pump 2FAC-EC (electric) model or 2FAC-M (engine) and all hosing and attachments.

PROFESSIONAL ENGINEERING

It doesn't matter if you are pumping out portable toilets or completing a remediation project for a client or at your own site. You need a professional grade pump out system to enhance your productivity. Wastecorp delivers.

Shown Right: HW-500 Series with a 525 gallon tank, Mud Sucker 2FA-M pump technology with a Hatz diesel engine, deck mounted utility box, three way valve system, hose reel for up to 50 ft. of hose.

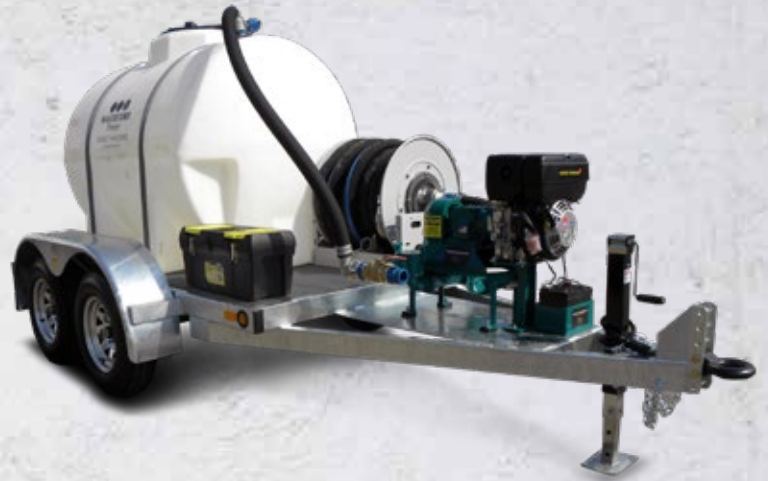

CUSTOM OPTIONS

Need a higher capacity pump? How about lockable hose storage cabinets that resist weather? Have you considered a spare tire or a fire extinguisher? Wastecorp's custom options help you configure your waste containment system completely to your needs.

Shown: HW-1000 Series with a 1035 gallon tank, Mud Sucker 3FA-M pump technology rated for up to 80 GPM, lockable storage cabinets and spare tire option.

CUSTOM CONTROL PANELS AND DRIVES AVAILABLE

Wastecorp can custom design your waste containment system to your specifications. Control panels, professional grade hose reels and over five types of motors are available. Consider Wastecorp your custom pump shop.

Gas, diesel, hydraulic, pneumatic, single or three phase electric and explosion proof motors available.



Shown: HW-150 Series, 150 gallon tank, air driven motor, push button start/stop control panel, ATV towing package, custom hose reel for non-collapsible hose.

Wastecorp Pump Out Caddy - WC-25



WC-25 Pump Out

Applications Designed for self service marinas or campgrounds. Boat owners and RV owners for safe and quick pump outs. Maneuvers easily in tight spaces.

Caddy Welded aluminum, polyurethane coating, two wheeled cart design -12" pneumatic tires

Tank 25 gallon polyethylene tank

Hose 1½" x 20' suction hose

Pump and Motor Specifications

Connection size	1½"
Max. liquid temperature	140°F (60°C) continuous
Pump body casing	Marine grade aluminum
Diaphragm	7" dia. fabric reinforced
Flapper valves	Fabric reinforced

Performance Range

Max. capacity	10 GPM
Max. suction lift	15 ft
Max. discharge head	15 ft.
Solids handling	1" dia or 50% by volume

Wastecorp's WC-25 pump out caddy features a sturdy frame and all premium marine grade components.

WC-25 Series Model Selection

Model	Part no.
WC-25 Pump Out Caddy	63696-00

Accessories for Salt Water Environments

Description	Part no.
Internals Protector Package: Stainless steel check valve seat, viton flappers, stainless steel weights, Viton gaskets and hardware	60633-08
304 SS clamping plate	60452-06
Wet section epoxy coating	61184-50

Spare Parts and Accessories

Description	Part no.
Standard Spare Parts Kit: rubber diaphragm, Viton flappers, steel weights and standard gaskets	62754-00
Premium Spare Parts Kit: Viton diaphragm, Viton flappers, SS weights and Viton gaskets	62754-06
Potty suction wand 1.5" x 24" L	62264-00
Potty suction wand 1.5" x 36" L	63267-00
Potty suction wand 1.5" x 48" L	63269-00

Wastecorp Honey Wagon HW-50



50 gallon - turf tire, trailer mounted model shown with gas engine and Mud Sucker 2FA Series diaphragm pump technology.

HW-50 Series

Mounting options	Turf trailer mounted (shown), ATV tow package or stationary
Tank	50 gallon polyethylene tank with vent, bulk head fitting and discharge drain valve
Hoses and Fittings	Qty: 1 - Suction Non-Collapsible EPDM Hose (Grn/Blk) with camlocks, 2" x 30 ft., and clear swing check valve and ball valve and female camlock to connect optional accessories
Valve	3-way valve system to empty tank using pump unit and 10' discharge hose
Applications	Septic pumping services, campgrounds, marinas, parks, special events, waste oil haulers, emergency remediation

Pump and Motor Specifications

Connection size	1.5" or 2" (2FAC-C Series)
Max. liquid temperature	140°F (60°C) continuous
Pump body casing	Aluminum (ASTM A356)
Diaphragm	7" dia. fabric reinforced
Flapper valves	Fabric reinforced
Gearbox	SEW Eurodrive or Siemens
Motor options	Electric, gas, diesel, air, hydraulic, explosion proof

Performance Range

Max. capacity	20 GPM
Max. suction lift	20' vertical or 75' horizontal
Max. discharge head	50' vertical or 300' horizontal
Solids handling	1½" dia or 50% by volume



The HW-50 can be customized for your specific application like pumping out locomotive rest rooms and waste oil.

HW-50 Series Model Selection

Model	Part no.
HW-1.5FA-EC-50-C - 1.5" Electric Mobile Pump Out	63254-00
HW-1.5FA-M-50-C - 1.5" Gas Mobile Pump Out	63250-00
HW-2FA-M-50-C - 2" Gas Mobile Pump Out System	63258-00
HW-2FA-EC-50-C - 2" Electric Mobile Pump Out	63262-00
HW-1.5FA-EC-50-S - 1.5" Electric Stationary Pump Out	63254-10
HW-1.5FA-M-50-S - 1.5" Gas Stationary Pump Out	63250-10
HW-2FA-M-50-S - 2" Electric Stationary Pump Out	63262-10
HW-2FA-M-50-S - 2" Gas Stationary Pump Out	63258-10
HW-2FA-EC-50-TT - 2" Electric Turf Tire Pump Out	64973-30
HW-2FA-M-50-TT - 2" Gas Turf Tire Pump Out	64973-00

Spare Parts and Accessories

Description	Part no.
Basic Spare Parts Kit: diaphragm and flappers	65062-00
Comprehensive Spare Parts Kit: diaphragm, flappers, weights, gaskets and hardware	65060-00
Potty Suction Wand 2" x 36" L	63245-00
Bearing rod end and crank arm assembly	62830-00
Universal RV sewer adapter kit	64042-00

Coatings for Salt Water Environments

Description	Part no.
Pump internal wet section coating PTFE-DFL	65156-50
Pump internal wet section coating. Xylan	65156-60

Wastecorp Honey Wagon 100-200 Utility Package



150 gallon model shown with Mud Sucker 2FA Series pump.



You specify the connection for your vehicle. Select from ATV, public transportation vehicles, Gator®, Bobcat® and much more.

HW-100-200 Series

Mounting options	ATV tow package (shown above), turf tire trailer mounted or stationary
Tank	Your choice of 100, 150 or 200 gallon polyethylene tank with vent, bulk head fitting and discharge drain valve
Hoses and fittings	Qty: 1 - Suction non-collapsible EPDM hose (Grn/Blk) with camlocks, 2" x 30 ft., and clear swing check valve and ball valve and female camlock to connect optional accessories
Valve	3-way valve system to empty tank using pump Unit and 10' discharge hose
Applications	Septic pumping services, campgrounds, marinas, parks, special events, waste oil haulers, emergency remediation

Pump and Motor Specifications

Connection size	1.5" or 2"
Max. liquid temperature	140°F (60°C) continuous
Pump body casing	Aluminum (ASTM A356)
Diaphragm	7" dia. fabric reinforced
Flapper valves	Fabric reinforced
Gearbox	SEW Eurodrive or Siemens
Motor options	Electric, gas, diesel, air, hydraulic, explosion proof

Performance Range

Max. capacity	20 GPM
Max. suction lift	20' vertical or 75' horizontal
Max. discharge head	50' vertical or 300' horizontal
Solids handling	1½" dia or 50% by volume

HW-100-200 Series Model Selection

Model	Part no.
HW-100-200 1.5" Electric Mobile	63255-00
HW-100-200 1.5" Gas Mobile	63251-00
HW-100-200 2" Gas Mobile	63259-00
HW-100-200 2" Electric Mobile Pump Out	63263-00
HW-100-200 1.5" Electric Stationary	63255-10
HW-100-200 1.5" Gas Stationary	63251-10
HW-100-200 2" Electric Stationary (100 gal)	65034-30
HW-100-200 2" Gas Stationary (150 gal)	65035-10
HW-100-200 2" Electric Turf Tire Trailer	64973-XX
HW-100-200 2" Engine Turf Tire Trailer	64973-XX

Spare Parts and Accessories

Description	Part no.
Basic Spare Parts Kit: diaphragm and flappers	65062-00
Comprehensive Spare Parts Kit: diaphragm, flappers, weights, gaskets and hardware	65060-00
Potty Suction Wand 2" x 36" L	63245-00
Bearing rod end and crank arm assembly	62830-00
Universal RV sewer adapter kit	64042-00

Coatings for Salt Water Environments

Description	Part no.
Pump internal wet section coating PTFE-DFL	65156-50
Pump internal wet section coating. Xylan	65156-60

Wastecorp Honey Wagon HW-300



Shown: HW-300-M-DT 325 gallon tank, Mud Sucker Diaphragm Pump technology, DOT approved, galvanized frame and deck.

HW-300 Series

Mounting options	DOT approved: electric brakes, galvanized deck/frame, lighting package. Utility Trailer: not for public roads Stationary base: Fabricated steel stationary skid base with fabricated steel hose stand or optional hose cage
Tank	325 gallon polyethylene tank with vent, bulk head fitting and discharge drain valve
Hoses and Fittings	Qty: 2 - non-collapsible EPDM Hose (Grn/Blk) with camlocks, 2" x 30 ft., and clear swing check valve and ball valve and female camlock to connect optional accessories
Valve	3-way valve system to empty tank using pump Unit and discharge lay flat hose
Applications	Septic pumping services, campgrounds, marinas, parks, special events, waste oil haulers, emergency remediation

Pump and Motor Specifications

Connection size	1.5" or 2" (2FAC Series)
Max. liquid temperature	140°F (60°C) continuous
Pump body casing	Aluminum (ASTM A356)
Diaphragm	7" dia. fabric reinforced
Flapper valves	Fabric reinforced
Gearbox	SEW Eurodrive or Siemens
Motor options	Electric, gas, diesel, air, hydraulic, explosion proof

Performance Range

Max. capacity	20 GPM
Max. suction lift	20' vertical or 75' horizontal
Max. discharge head	50' vertical or 300' horizontal
Solids handling	1½" dia or 50% by volume

HW-300 Series Model Selection

Model	Part no.
HW-300-EC-DT 325 gallon, DOT approved trailer mounted, electric motor,	63730-20
HW-300-EC-UT 325 gallon, utility trailer, electric motor	63730-10
HW-300-EC-S 325 gallon, stationary, electric motor	63730-00
HW-300-M-DT 325 gallon, DOT approved, Honda GX Series engine	63734-20
HW-300-M-UT 325 gallon, utility trailer, Honda GX Series engine	63734-10
HW-300-M-S 325 gallon, stationary, Honda GX Series engine	63734-00

Spare Parts and Accessories

Description	Part no.
Basic Spare Parts Kit: diaphragm and flappers	65062-00
Comprehensive Spare Parts Kit: diaphragm, flappers, weights, gaskets and hardware	65060-00
Bearing rod end assembly	64499-00
Potty suction wand (up to 48")	62672-00
Hose cage, fender mounted	62449-00

Wastecorp Honey Wagon HW-100-200-32FA Series



Enhanced Pumping Power Model - Up to 100' suction**

Model HW-32FA-M-100-C - 100 gallon model shown on ATV wagon

HW-100-200 Series

Mounting options	Turf tires, trailer mounted (shown), ATV wagon, utility/DOT trailer or stationary skid available
Tank	Your choice of 100, 150 or 200 gallon polyethylene tank with vent, bulk head fitting and discharge drain valve
Hoses and fittings	Non-collapsible hose with camlocks, 2" x 30 ft., and clear swing check valve and ball valve and female camlock to connect to marine pump out nozzle
Valve	3-way valve system to empty tank using pump Unit and discharge lay flat hose
Applications	Septic pumping services, campgrounds, marinas, parks, special events, waste oil haulers, emergency remediation

Pump and Motor Specifications

Connection size	2"
Max. liquid temperature	140°F (60°C) continuous
Pump body casing	Aluminum (ASTM A356)
Diaphragm	13" dia. fabric reinforced
Flapper valves	Fabric reinforced
Gearbox	SEW Eurodrive or Siemens
Motor options	Electric, gas, diesel, air, hydraulic, explosion proof

Performance Range

Max. capacity	50 GPM
Max. suction lift	20' vertical or 75' horizontal
Max. discharge head	50' vertical or 300' horizontal
Solids handling	1½" dia or 50% by volume

HW-100-200-3FA Series Model Selection

Model	Part no.
HW-32FA-EC-100-S - 100 gallon, skid mounted, electric	65170-00
HW-32FA-EC-100-C - 100 gallon, ATV cart, electric	65170-10
HW-32FA-EC-100-UT - 100 gallon, utility trailer, electric	65170-20
HW-32FA-EC-100-TT - 100 gallon, turf tire trailer, electric	65170-30
HW-32FA-M-100-S - 100 gallon, skid mounted, gas engine	65171-00
HW-32FA-M-100-C - 100 gallon, ATV cart, engine	65171-10
HW-32FA-M-100-UT - 100 gallon, utility trailer, engine	65171-20
HW-32FA-M-100-TT - 100 gallon, turf tire trailer, engine	65171-30

Spare Parts and Accessories

Description	Part no.
Basic Spare Parts Kit: Diaphragm, flappers only	61287-00
Comprehensive Spare Parts Kit: Diaphragm, flappers, weights, gaskets and hardware	61286-00
Bearing rod end assembly	64499-00
Hose Non-collapsible EPDM, yellow, tiger tail 1.5" x 30 ft c/w C&E camlocks	62264-00
Potty suction wand (up to 2x48" L)	62679-00
Universal RV sewer adapter	64042-00

Coatings for Salt Water Environments

Description	Part no.
Pump internal wet section coating PTFE-DFL	65156-50
Pump internal wet section coating, Xylan	65156-60

** Pumping capabilities are determined by fluid thickness, solids content, discharge distance and elevation. Contact a Wastecorp technical support representative for assistance with your application.

Wastecorp Honey Wagon HW-300-32FA



Enhanced Pumping Power Model - Up to 100' suction**

Shown: HW-300-32FA Series with 325 gallon tank, Mud Sucker 3FA Series, diaphragm pump technology, 2" discharge line, DOT approved, galvanized frame/deck. Up to 100' of suction power**

HW-300-32FA Series

Mounting options	DOT approved: electric brakes, galvanized deck/frame, lighting package. Turf Tire Trailer: wider tires to reduce impact on landscaping Utility Trailer: not for public roads Stationary base: Fabricated steel stationary skid base with fabricated steel hose stand, painted
Tank	325 gallon polyethylene tank with vent, bulk head fitting and discharge drain valve
Hoses and Fittings	Non-collapsible hose with camlocks, 2" x 30 ft., and clear swing check valve and ball valve and female camlock to connect to marine pump out nozzle
Valve	3-way valve system to empty tank using pump Unit and discharge lay flat hose
Applications	Septic pumping services, marinas, State/Federal/Provincial parks, special events, emergency remediation

Pump and Motor Specifications

Connection size	2"
Max. liquid temperature	140°F (60°C) continuous
Pump body casing	Aluminum (ASTM A356)
Diaphragm	13" dia. fabric reinforced
Flapper valves	Fabric reinforced
Gearbox	SEW Eurodrive or Siemens
Motor options	Electric, gas, diesel, air, hydraulic, explosion proof

Performance Range

Max. capacity	50 GPM
Max. suction lift	20' vertical or 75' horizontal
Max. discharge head	50' vertical or 300' horizontal
Solids handling	1½" dia. or 50% by volume

HW-300-32FA Series Model Selection

Model	Part no.
HW-32FA-EC-300-S- 325 gallon, skid mounted, electric	65176-00
HW-32FA-EC-300-DT- 325 gallon, DOT trailer, electric	65176-10
HW-32FA-EC-300-UT- 325 gallon, utility trailer, electric	65176-20
HW-32FA-EC-300-TT - 325 gallon, turf tire trailer, electric	65176-30
HW-32FA-M-300-S- 325 gallon, skid mounted, engine driven	65177-00
HW-32FA-M-300-DT- 325 gallon, DOT trailer, engine	65177-10
HW-32FA-M-300-UT -325 gallon, utility trailer, engine	65177-20
HW-32FA-M-300-TT- 325 gallon, turf tire trailer, engine	65177-30

Spare Parts and Accessories

Description	Part no.
Basic Spare Parts Kit: Diaphragm, flappers only	61287-00
Comprehensive Spare Parts Kit: Diaphragm, flappers, weights, gaskets and hardware	61286-00
Bearing rod end assembly	64499-00
Hose Non-collapsible, yellow, tiger tail 1.5" x 30 ft c/w C&E camlocks	62264-00
Potty suction wand (up to 2" x 48" L)	62672-00
Universal RV sewer adapter	64042-00

Accessories for Salt Water Environments

Description	Part no.
Pump internal wet section coating PTFE-DFL	65156-50
Pump internal wet section coating, Xylan	65156-60

** Pumping capabilities are determined by fluid thickness, solids content, discharge distance and elevation. Contact a Wastecorp technical support representative for assistance with your application.



HW-300 -UT Series shown here at a marina for bilge transfer, pumping out boats/yachts. Includes a 325 gallon tank and universal marine attachments. Off road trailer shown for use on site. DOT trailers also available.



Wastecorp Honey Wagon HW-500



Shown: HW-500-M-DT 525 gallon tank, Mud Sucker Diaphragm Pump technology, DOT approved, galvanized frame and deck.

HW-500 Series

Mounting options	DOT approved: electric brakes, galvanized deck/frame, lighting package. Utility trailer: not for public roads Stationary base: Fabricated steel stationary skid base with fabricated steel hose cage
Tank	525 gallon polyethylene tank with vent, bulk head fitting and discharge drain valve
Hoses and Fittings	Qty: 2 - non-collapsible EPDM Hose (grn/blk) with camlocks, 2" x 30 ft., and clear swing check valve and ball valve and female camlock to connect optional accessories
Valve	3-way valve system to empty tank using pump unit and discharge hose
Applications	Septic pumping services, campgrounds, marinas, parks, special events, waste oil haulers, emergency remediation

Pump and Motor Specifications

Connection size	1.5" or 2"
Max. liquid temperature	140°F (60°C) continuous
Pump body casing	Aluminum (ASTM A356)
Diaphragm	7" dia. fabric reinforced
Flapper valves	Fabric reinforced
Gearbox	SEW Eurodrive or Siemens
Motor options	Electric, gas, diesel, air, hydraulic, explosion proof

Performance Range

Max. capacity	20 GPM
Max. suction lift	20' vertical or 75' horizontal
Max. discharge head	50' vertical or 300' horizontal
Solids handling	1½" dia or 50% by volume

HW-500 Series Model Selection

Model	Part no.
HW-500-EC-DT 525 gallon, DOT approved trailer mounted, electric motor,	63735-20
HW-500-EC-UT 525 gallon, utility trailer, electric motor	63735-10
HW-500-EC-S 525 gallon, stationary, electric motor	63735-00
HW-500-M-DT 525 gallon, DOT approved, Honda GX Series engine	63736-20
HW-500-M-UT 525 gallon, utility trailer, Honda GX Series engine	63736-10
HW-300-M-S 525 gallon, stationary, Honda GX Series engine	63736-00

Spare Parts and Accessories

Description	Part no.
Basic Spare Parts Kit: diaphragm and flappers	65062-00
Comprehensive Spare Parts Kit: diaphragm, flappers, weights, gaskets and hardware	65060-00
Potty Suction Wand 2" x 24" L	63244-00
Bearing rod end and crank arm assembly	62830-00
Universal RV sewer adapter kit	64042-00
Hose reel, manual crank. Fits up to 2"x75' of non-collapsible hose (hose not included)	63635-00

Wastecorp Honey Wagon HW-1000



Shown: HW-1000-M-3FA-DT 1025 gallon tank, Mud Sucker Diaphragm Pump technology model 3FA-M (3" pump), DOT approved, galvanized frame and deck + hose cage

HW-1000 Series

Mounting options	DOT approved: electric brakes, galvanized deck/frame, lighting package. Stationary base: Fabricated steel stationary skid base with fabricated steel hose stand or optional hose cage, painted
Tank	1025 gallon horizontal polyethylene tank with vent, bulk head fitting and discharge drain valve. Optional: 1035 gallon or 1335 gallon elliptical leg tank
Hoses and Fittings	Qty: 2 - non-collapsible EPDM hose (grn/blk) with camlocks, 2" x 30 ft., and clear swing check valve and ball valve and female camlock to connect optional accessories (3" hoses included on systems with 3" pumps)
Valve	3-way valve system to empty tank using pump unit and discharge hose
Applications	Septic pumping services, campgrounds, marinas, parks, special events, waste oil haulers, emergency remediation

Pump and Motor Specifications

Connection size	2", 3" or 4" (custom spec)
Max. liquid temperature	140°F (60°C) continuous
Pump body casing	Aluminum (ASTM A356)
Diaphragm	Size based on pump selected
Flapper valves	Fabric reinforced
Gearbox	SEW Eurodrive or Siemens
Motor options	Electric, gas, diesel, air, hydraulic, explosion proof

Performance Range

Max. capacity	20-110 GPM
Max. suction lift	20' vertical or 75' horizontal
Max. discharge head	50' vertical or 300' horizontal
Solids handling	Varies based on pump selected

HW-1000 Series - 2" Pump Model Selection

Model	Part no.
HW-1000-EC-DT 1025 gallon tank, DOT approved trailer mounted, electric motor	64244-20
HW-1000-EC-S 1025 gallon tank, stationary, electric motor	64244-00
HW-1000-M-DT 1025 gallon tank, DOT approved, Honda GX Series engine	64033-10
HW-1000-M-S 1025 gallon, stationary, Honda GX Series engine	64033-00

HW-1000 Series - 3" Pump Model Selection

Model	Part no.
HW-1000-EC-DT - 3" pump, 1025 gallon tank, DOT approved trailer mounted, electric motor	64259-20
HW-1000-EC-S - 3" pump, 1025 gallon tank, stationary, electric motor	64259-00
HW-1000-M-DT - 3" pump, 1025 gallon tank, DOT approved, Honda GX Series engine	64032-20
HW-1000-M-S - 3" pump, 1025 gallon tank, stationary, Honda GX Series engine	64032-00

Spare Parts and Accessories

Description	Part no.
Basic Spare Parts Kit: diaphragm and flappers	65062-00
Comprehensive Spare Parts Kit: diaphragm, flappers, weights, gaskets and hardware	65060-00
Potty Suction Wand 3" x 36" L	63305-00
Bearing rod end and crank arm assembly	62830-00
Universal RV sewer adapter kit	64042-00
Hose reel, manual crank. Fits up to 2"x75' of non-collapsible hose (hose not included)	63635-00

Wastecorp Honey Wagon HW-1600



Shown: HW-1600-M-DT 1035 gallon tank, Mud Sucker Diaphragm Pump technology, DOT approved, galvanized frame and deck. Hose cage mounted on fender.

HW-1600 Series

Mounting options	DOT approved: electric brakes, galvanized deck/frame, lighting package. Stationary base: Fabricated steel stationary skid base with fabricated steel hose stand, painted
Tank	1635 gallon polyethylene tank with vent, bulk head fitting and discharge drain valve
Hoses and Fittings	Qty: 2 - Non-collapsible EPDM hose (Grn/Blk) with camlocks, 2" x 30 ft., and clear swing check valve and ball valve and female camlock to connect optional accessories (3" hoses included on systems with 3" pumps)
Valve	3-way valve system to empty tank using pump Unit and discharge hose
Applications	Septic pumping services, campgrounds, marinas, parks, special events, waste oil haulers, emergency remediation

Pump and Motor Specifications

Connection size	2", 3" or 4"
Max. liquid temperature	140°F (60°C) continuous
Pump body casing	Aluminum (ASTM A356)
Diaphragm	Varies depending on pump
Flapper valves	Fabric reinforced
Gearbox	SEW Eurodrive or Siemens
Motor options	Electric, gas, diesel, air, hydraulic, explosion proof

Performance Range

Max. capacity	20-110 GPM
Max. suction lift	20' vertical or 75' horizontal
Max. discharge head	50' vertical or 300' horizontal
Solids handling	Varies depending on pump selected

HW-1600 Series 2" Pump Model Selection

Model	Part no.
HW-1600-EC-DT 1635 gallon, DOT approved trailer mounted, electric motor,	64246-20
HW-1600-EC-S 1635 gallon, stationary, electric motor	64246-00
HW-1600-M-DT 1635 gallon DOT approved, Honda GX Series engine	64250-20
HW-1600-M-S 1635 gallon stationary, Honda GX Series engine	64250-00

HW-1600 Series 3" Pump - Model Selection

Model	Part no.
HW-1600-EC-DT - 3" pump, 1635 gallon tank, DOT approved trailer mounted, electric motor	64262-20
HW-1000-EC-S - 3" pump, 1635 gallon tank, stationary, electric motor	64262-00
HW-1600-M-DT - 3" pump, 1635 gallon tank, DOT approved, Honda GX Series engine	64254-20
HW-1600-M-S - 3" pump, 1635 gallon tank, stationary, Honda GX Series engine	64254-00

Spare Parts and Accessories

Description	Part no.
Basic Spare Parts Kit: diaphragm and flappers	65062-00
Comprehensive Spare Parts Kit: diaphragm, flappers, weights, gaskets and hardware	65060-00
Potty Suction Wand 3" x 48" L	63307-00
Bearing rod end and crank arm assembly	62830-00
Universal RV sewer adapter kit	64042-00
Hose reel, manual crank. Fits up to 2"x75' of non-collapsible hose (hose not included)	63635-00
Premium high side tool box (aluminum)	62867-00
Fire extinguisher	62868-00
Cover, fire extinguisher	62870-00

Wastecorp Honey Wagon HW-2000-5000



Shown: HW-2500-M-DT 2500 gallon tank on a dually trailer with a Mud Sucker 3B-M-DD pump rated for up to 220 GPM.

HW-2000-5000 Series

Mounting options	DOT approved: electric brakes, galvanized deck/frame, lighting package. Stationary base: Fabricated steel stationary skid base with fabricated steel hose cage
Tank	2000-5000 gallon polyethylene tank with vent, bulk head fitting and discharge drain valve
Hoses and Fittings	Qty: 2 - Non-collapsible EPDM hose (grn/blk) with camlocks, 2" x 30 ft., and clear swing check valve and ball valve and female camlock to connect optional accessories (3" hoses included on systems with 3" pumps)
Valve	3-way valve system to empty tank using pump unit and discharge hose
Applications	Septic pumping services, campgrounds, marinas, parks, special events, waste oil haulers, emergency remediation

Pump and Motor Specifications

Connection size	2", 3" or 4" (custom spec)
Max. liquid temperature	140°F (60°C) continuous
Pump body casing	Marine grade aluminum (ASTM A356)
Diaphragm	Varies depending on pump
Flapper valves	Fabric reinforced
Gearbox	SEW Eurodrive or Siemens
Motor options	Electric, gas, diesel, air, hydraulic, explosion proof

Performance Range

Max. capacity	Varies depending on pump model
Max. suction lift	Varies depending on pump model
Max. discharge head	Varies depending on pump model
Solids handling	Varies depending on pump model

HW-2000 Series - 2" Pump Model Selection

Model	Part no.
HW-2000-EC-DT 2035 gallon, DOT approved trailer mounted, electric motor,	64247-20
HW-2000-EC-S 2035 gallon, stationary, electric motor	64247-00
HW-2000-M-DT 2035 gallon, DOT approved, Honda GX Series engine	64252-20
HW-2000-M-S 2035 gallon, stationary, Honda GX Series engine	64252-00

HW-2000 Series - 3" Pump Model Selection

Model	Part no.
HW-2000-EC-DT - 3" pump, 2035 gallon tank, DOT approved trailer mounted, electric motor	64263-20
HW-2000-EC-S - 3" pump, 2035 gallon tank, stationary, electric motor	64263-00
HW-2000-M-DT - 3" pump, 2035 gallon tank, DOT approved, Honda GX Series engine	65186-00
HW-2000-M-S - 3" pump, 2035 gallon tank, stationary, Honda GX Series engine	65186-20

Spare Parts and Accessories

Description	Part no.
Basic Spare Parts Kit: diaphragm and flappers	65062-00
Comprehensive Spare Parts Kit: diaphragm, flappers, weights, gaskets and hardware	65060-00
Potty Suction Wand: 3" x 24" L	63305-00
Bearing rod end and crank arm assembly	62830-00
Universal RV sewer adapter kit	64042-00
Hose reel, manual crank. Fits up to 2"x75' of non-collapsible hose (hose not included)	63635-00
Premium high side tool box (aluminum)	62867-00
Fire extinguisher	62866-00
Cover, fire extinguisher	62870-00

WASTE CONTAINMENT + FRESH WATER DISTRIBUTION. AN ALL-IN-ONE WINNER. WASTECORP HW-RECOVERY SERIES.


Wastecorp's dual waste containment + fresh water distribution systems helps you improve productivity on your job site by helping you pump out waste and provide water all in one system. Our systems include a dual pump system - a Mud Sucker® diaphragm pump to collect wastewater and a high pressure water delivery pump for fresh water distribution or wash down services. You select the tank combination that is right for you and the pump sizes so you get the performance you need.

Applications

- Where sanitary hose lines and tanks are critical
- Ideal to pump out lagoons, RVs, portable toilets, septic tanks commercial or leisure vessels or locomotive holding tanks and more

Benefits

- Provides the ultimate in sanitation
- Rear discharge for quick wastewater removal
- Step decks for easy hose inspection and maintenance
- Heavy duty hose rack

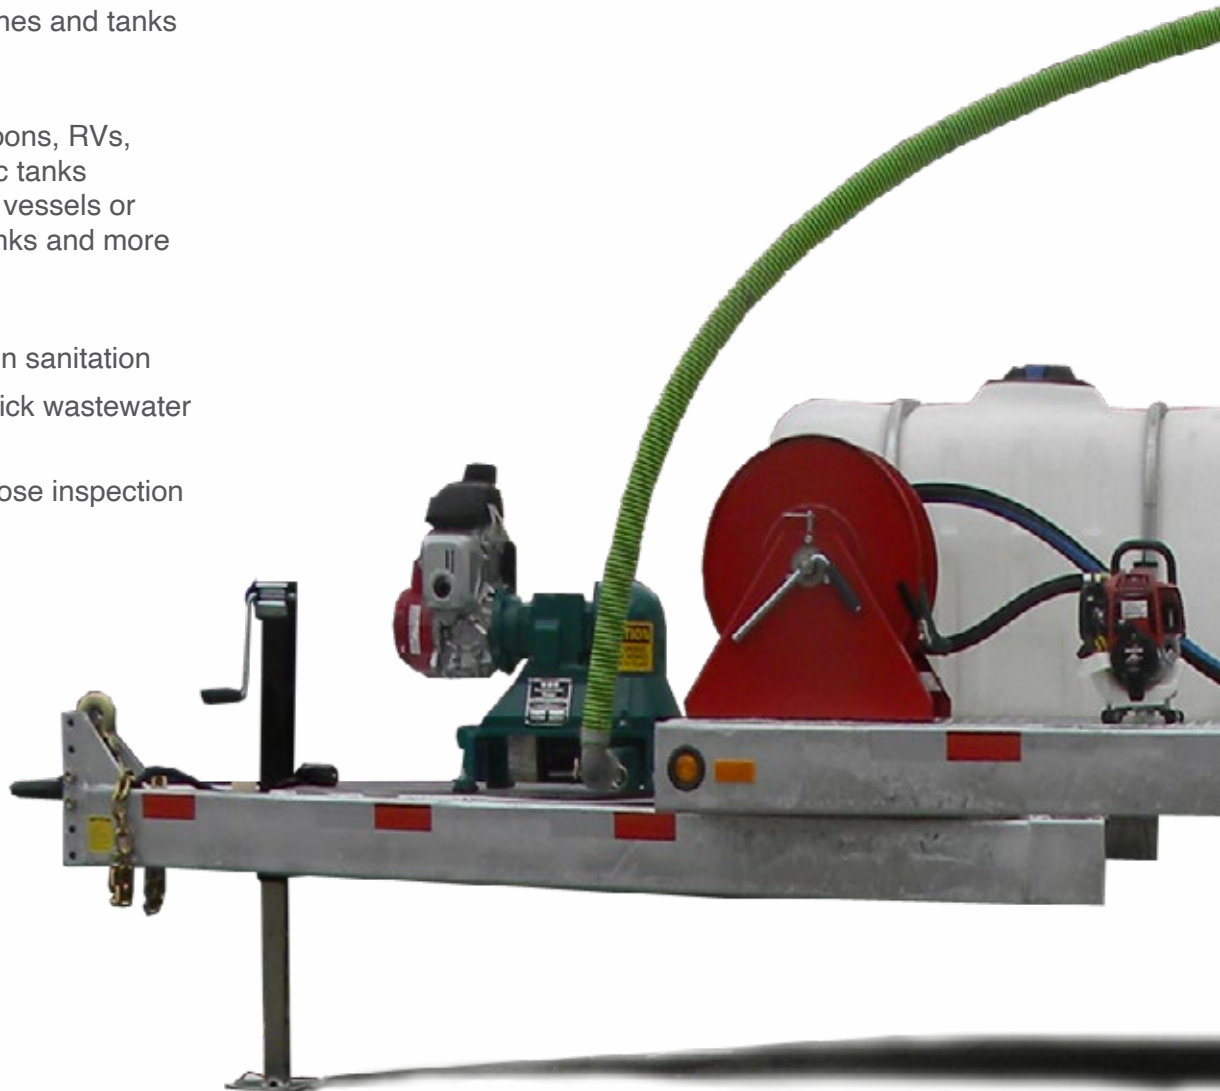



Waste pump and fresh water pump



Standard hose bin



Optional features like automated jacks



SKID MOUNTED PUMP OUT SYSTEMS. VERSATILE. HIGH QUALITY. MOUNT ANYWHERE.

Skid mounted pump out systems from Wastecorp offer a variety of tank sizes and configurations to fit your application. Whether you are mounting on a truck, concrete pad or moving it frequently with a forklift, you'll get the high quality construction coupled with Mud Sucker pump technology that you need.



Rear mounted pump with dual fork hose stand



Side mounted pump with hose ring mounted above.



Rear mounted pump with hose stand configured close to pump. 725 gallon and higher sizes only.



Front mounted pump with no hose stand. May be suitable for confined spaces.

With a variety of configuration options, Wastecorp's skid mounted honey wagons can be mounted almost anywhere such as golf carts, pump out boats and more.



Choice of five drive systems



Standard three way valve system



Professional grade hose package

Waste + Water Tank



Part #	Model	Description
64276-10	HW-2FA-EC-325-100 (ST)	325 gallon waste tank, electric motor, skid mounted, 100 gallon rinse tank
64276-15	HW-2FA-EC-325-150 (ST)	325 gallon waste tank, electric motor, skid mounted, 150 gallon rinse tank
64276-00	HW-2FA-EC-325-50 (ST)	325 gallon waste tank, electric motor, skid mounted, 50 gallon rinse tank
64277-10	HW-2FA-EC-525-100(ST)	525 gallon waste tank, electric motor, skid mounted, 100 gallon rinse tank
64277-15	HW-2FA-EC-525-150(ST)	525 gallon waste tank, electric motor, skid mounted, 150 gallon rinse tank
64277-00	HW-2FA-EC-525-50(ST)	725 gallon waste tank, electric motor, skid mounted, 50 gallon rinse tank
64130-10	HW-2FA-EC-725-100 (DOT)	725 gallon waste tank, electric motor, DOT Trailer, 100 gallon rinse tank
64278-10	HW-2FA-EC-725-100(ST)	725 gallon waste tank, electric motor, skid mounted, 150 gallon rinse tank
64130-15	HW-2FA-EC-725-150 (DOT)	725 gallon waste tank, electric motor, DOT Trailer, 150 gallon rinse tank
64278-15	HW-2FA-EC-725-150(ST)	725 gallon waste tank, electric motor, skid mounted, 150 gallon rinse tank
64130-00	HW-2FA-EC-725-50 (DOT)	725 gallon waste tank, electric motor, DOT Trailer, 50 gallon rinse tank
64278-00	HW-2FA-EC-725-50(ST)	725 gallon waste tank, electric motor, skid mounted, 50 gallon rinse tank
64279-10	HW-2FA-M-325-100(ST)	325 gallon waste tank, engine driven, skid mounted, 100 gallon rinse tank
64279-15	HW-2FA-M-325-150(ST)	325 gallon waste tank, engine driven, skid mounted, 150 gallon rinse tank
64279-00	HW-2FA-M-325-50(ST)	325 gallon waste tank, engine driven, skid mounted, 50 gallon rinse tank
64280-10	HW-2FA-M-525-100(ST)	525 gallon waste tank, engine driven, skid mounted, 100 gallon rinse tank
64280-15	HW-2FA-M-525-150(ST)	525 gallon waste tank, engine driven, skid mounted, 150 gallon rinse tank
64280-00	HW-2FA-M-525-50(ST)	525 gallon waste tank, engine driven, skid mounted, 50 gallon rinse tank
64281-10	HW-2FA-M-725-100(ST)	725 gallon waste tank, engine driven, skid mounted, 100 gallon rinse tank
64281-15	HW-2FA-M-725-150(ST)	725 gallon waste tank, engine driven, skid mounted, 150 gallon rinse tank
64281-00	HW-2FA-M-725-50(ST)	725 gallon waste tank, engine driven, skid mounted, 50 gallon rinse tank
64396-00	HW-2FA-M-200-150-DOT	200 gallon waste tank, engine driven, DOT Trailer, 150 gallon rinse tank
64282-10	HW-2FA-EC-325-100 DT	325 gallon waste tank, engine driven, DOT Trailer, 100 gallon rinse tank
64282-15	HW-2FA-EC-325-150 DT	325 gallon waste tank, electric motor, DOT Trailer, 150 gallon rinse tank
64282-00	HW-2FA-EC-325-50 DT	325 gallon waste tank, electric motor, DOT Trailer, 50 gallon rinse tank
64283-10	HW-2FA-EC-525-100 DT	525 gallon waste tank, electric motor, DOT Trailer, 100 gallon rinse tank
64283-15	HW-2FA-EC-525-150 DT	525 gallon waste tank, electric motor, DOT Trailer, 150 gallon rinse tank
64283-00	HW-2FA-EC-525-50 DT	525 gallon waste tank, electric motor, DOT Trailer, 50 gallon rinse tank
64284-10	HW-2FA-M-325-100 DT	325 gallon waste tank, electric motor, DOT Trailer, 100 gallon rinse tank
64284-15	HW-2FA-M-325-150 DT	325 gallon waste tank, engine driven, DOT Trailer, 150 gallon rinse tank
64284-00	HW-2FA-M-325-50 DT	325 gallon waste tank, engine driven, DOT Trailer, 50 gallon rinse tank
64285-10	HW-2FA-M-525-100 DT	525 gallon waste tank, engine driven, DOT Trailer, 100 gallon rinse tank
64285-15	HW-2FA-M-525-150 DT	525 gallon waste tank, engine driven, DOT Trailer, 150 gallon rinse tank
64285-00	HW-2FA-M-525-50 DT	525 gallon waste tank, engine driven, DOT Trailer, 50 gallon rinse tank

Skid Mounted Waste Tank Models



Part #	Model	Description
64387-00	HW-1.5FA-EC-50 (ELECTRIC)	50 gallon, electric with 1½" connection
63262-00	HW-1.5FA-H-50	50 gallon, manual with 1½" connection
63686-00	HW-1.5FA-M-50 (ENGINE DRIVEN)	50 gallon, engine with 1½" connection
63258-00	HW-2FA-AP-50	50 gallon, air driven with 1½" connection
63254-10	HW-2FA-EC-50	50 gallon, electric with 2" connection
63682-10	HW-2FA-H-50	50 gallon, manual with 2" connection
63250-10	HW-2FA-M-50	50 gallon, engine with 2" connection
63688-10	HW-2FA-H-150	150 gallon, manual with 2" connection
63260-10	HW-2FA-M-150	150 gallon, engine with 2" connection
63257-10	HW-1.5FA-EC-200	200 gallon, electric with 1½" connection
63685-10	HW-1.5FA-H-200	200 gallon, manual with 1½" connection
63253-10	HW-1.5FA-M-200	200 gallon, engine with 1½" connection
63265-10	HW-2FA-EC-200	200 gallon, electric with 2" connection
63689-10	HW-2FA-H-200	200 gallon, manual with 2" connection
63261-10	HW-2FA-M-200	200 gallon, engine with 2" connection
63730-15	HW-2FA-EC-325-S	325 gallon, electric with 2" connection
63730-20	HW-2FA-M-325-S	325 gallon, engine with 2" connection
63262-10	HW-2FA-EC-525-S	525 gallon, electric with 2" connection
63735-20	HW-2FA-M-525-S	525 gallon, engine with 2" connection
63736-20	HW-3FA-M-525-S	525 gallon, engine with 3" connection
63737-20	HW-2FA-M-725-S	725 gallon, engine with 2" connection
63737-00	HW-2FA-EC-1035-S	1035 gallon, electric with 2" connection
63737-10	HW-2FA-EC-1335-S	1335 gallon, electric with 2" connection
64487-00	HW-2FA-EC-1635-S (STATIONARY)	1635 gallon, electric with 2" connection
64140-00	HW-2FA-EC-2035-S (STATIONARY)	2035 gallon, electric with 2" connection
64244-00	HW-2FA-M-1035-S (STATIONARY)	1035 gallon, engine with 2" connection
64245-00	HW-2FA-M-1335-S (STATIONARY)	1335 gallon, engine with 2" connection
64246-00	HW-2FA-M-1635-S (STATIONARY)	1335 gallon, engine with 2" connection
64247-00	HW-2FA-M-2335-S (STATIONARY)	2335 gallon, engine with 2" connection
64248-00	HW-3FA-EC-1025-S (STATIONARY)	1025 gallon, electric with 3" connection
64250-00	HW-3FA-EC-1335-S (STATIONARY)	1335 gallon, electric with 3" connection
64251-00	HW-3FA-EC-1635-S (STATIONARY)	1635 gallon, electric with 3" connection
64259-00	HW-3FA-EC-2035-S (STATIONARY)	2035 gallon, electric with 3" connection
64260-00	HW-3FA-M-1035-S (STATIONARY)	1035 gallon, engine with 3" connection
64261-00	HW-3FA-M-1335-S (STATIONARY)	1335 gallon, engine with 3" connection
64262-00	HW-3FA-M-1635-S (STATIONARY)	1635 gallon, engine with 3" connection


Wastecorp Honey Wagon Sample Installations



HW-300-DT Series honey wagon waste containment system. Galvanized deck and frame, engine driven Mud Sucker pump technology. 325 gallon tank with DOT package (electric brakes and lighting package). This installation used to pump out RV black water tanks, portable toilets and septic waste.



HW-150-ATV Series portable waste recovery system. 150 gallon tank, ATV hitch for towing with (John Deere Gator, Kawasaki Mule, Polaris, Volunteer, Bobcat, etc). Three way valve system for pumping both into and out of the tank. Installation used by the National Guard to contain an oil spill from an industrial facility during a flood.

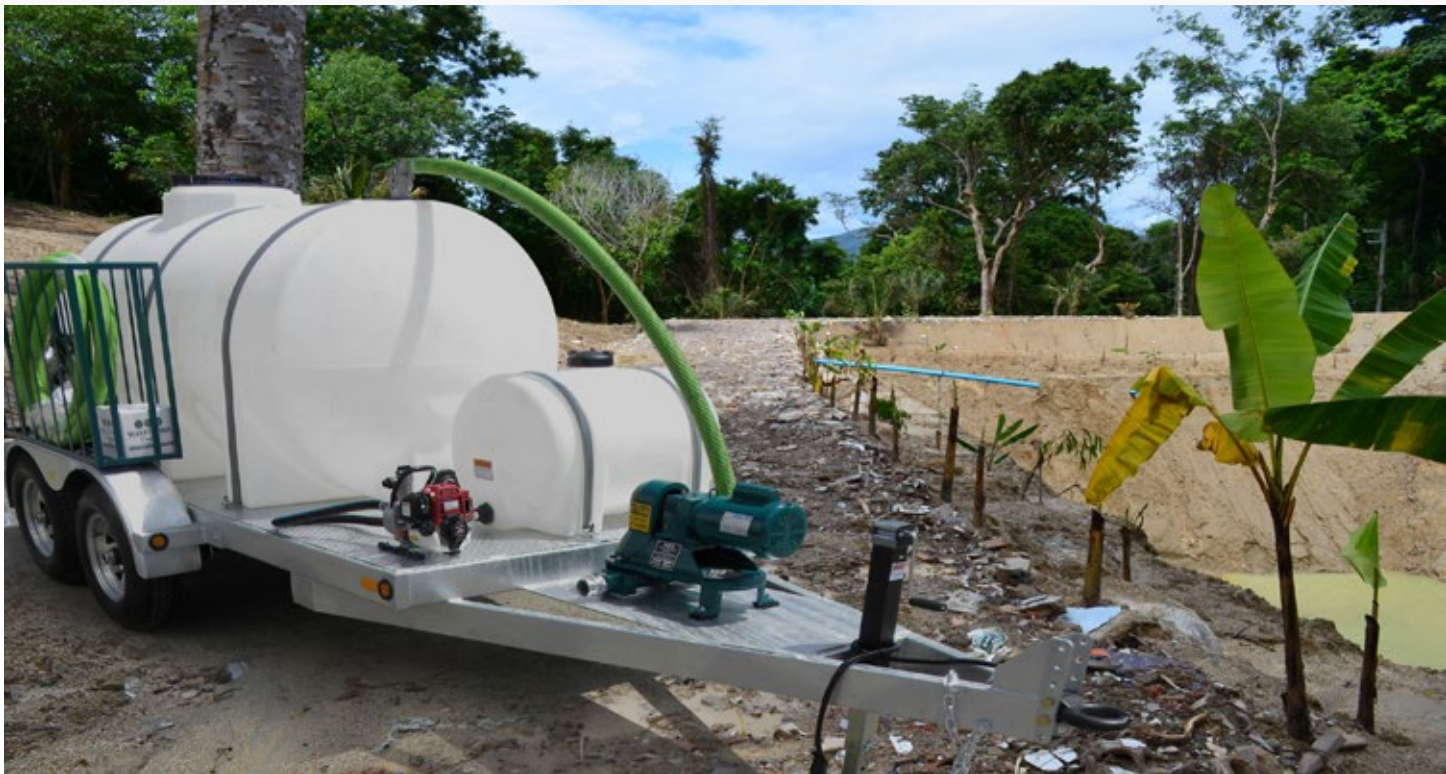

HW-725-100-DT Series Waste +Water tank system. 725 gallon waste tank and 100 gallon fresh water tank. Electric model. Two pumps included: Mud Sucker electric diaphragm pump technology and a TFX high pressure water pump. Fully galvanized deck and trailer frame, fender mounted industrial grade hose cage for storage. Installation used on a construction site for an industrial building site. Pumps out contaminated wastewater, fresh water used for site prep and to clean equipment and tools.



HW-2000 Series. 2035 gallon tank, dually trailer, dual jack, galvanized deck and frame. Mud Sucker mechanical AOD pump motor technology. Installation used on a US Army base for pumping out septic systems at remote training facility.

North America: 1-888-829-2783

Fax: 1-888-883-3320

Worldwide: +1-201-445-2882

Fax: +1-201-445-3252

E-mail: info@wastecorp.com

Internet: www.wastecorp.com

SELECT A HONEY WAGON DESIGNED FOR YOUR APPLICATION.

Wastecorp is an ISO 9001 certified honey wagon manufacturer. Honey wagon waste containment and sanitation systems are available in several sizes ranging from 25 gallon (96 liters) to over 5000 gallon (18,900 liters) tank sizes. All models are designed for heavy use pumping applications at campgrounds, marinas, yacht clubs, commercial aviation, railroads, waste vegetable oil collection, industrial remediation pumping, municipal and military liquid waste containment, hydro power plant pumping and much more.



WASTECORP
Pumps®

Specifications, literature and illustrative material in this honey wagon brochure are accurate at the time of publication but are subject to change without notice. Illustrations may include optional equipment and accessories and may not include all standard equipment. Wastecorp and globes are trademarks of WPI/Wastecorp Pumps. Wastecorp Pumps is the exclusive manufacturer of these brands worldwide under license. Marks are protected in North America and worldwide.

© 2025 WPI. V.1 Rev 01/25. All rights reserved. New York, NY 10024.
NYC/West85 Djs. Litho in the United States of America.
For a complete engineering specification contact Wastecorp Pumps at 1.888.829.2783 or by E-mail: info@wastecorp.com.

Also on the web at <http://www.wastecorp.com>