WASTECORP. Pumps®

SLUDGE MASTER®
SPACE SAVER PLUNGER PUMPS
SS SERIES

SIMPLEX PUMP MODELS

PE 741 SS III™

PE 941 SS IIII™

PE 1141 SS III™

DUPLEX PUMP MODELS

PE 942 SS IIII™

PE 1142 SS III™

TRIPLEX PUMP MODELS

PE 943 SS IIII™

PE 1143 SS III™

SPHERICAL SOLIDS:
1 ¾" (44.45 mm)

PERCENT SOLIDS:
Municipal Sludge's up to 15% dry weight.

Industrial Sludge's up to 70% sand/clay in suspension.

Max S.G. 2.2 to 2.4


SUCTION LIFTS:
Dry Prime: 22" Hg (25 feet)

AIR HANDLING:
All others – 25 cu. ft./min at max pressure of 30 psi.

WASTECORP.COM


Simplex



Triplex

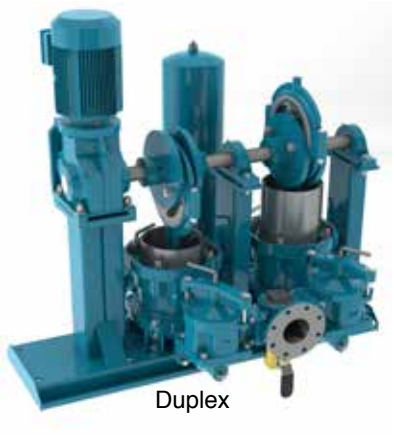
Duplex

SPACE SAVER PLUNGER PUMPS

When it comes to space saving sewage pumps, Wastecorp has the ideal Space Saver plunger pump for your facility needs. This series is one of the most compact heavy duty sludge pumps on the market.

You can select from three packing options for superior leak protection plus, stainless steel, bronze or standard cast iron components for the ultimate customized plunger pump. All models include premium SEW Eurodrive or Siemens drive options.

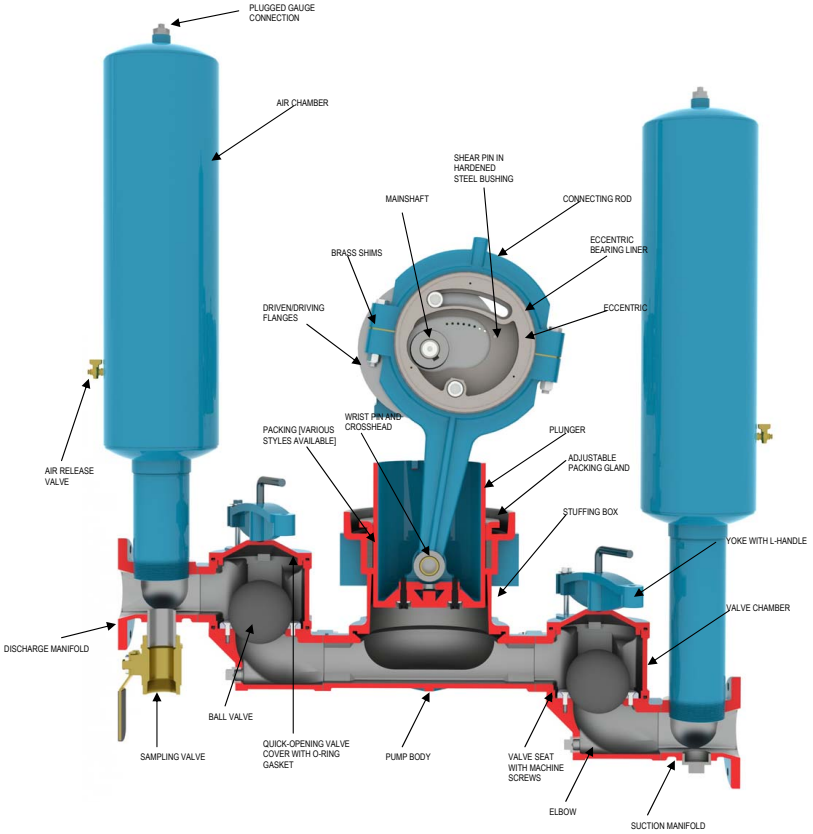

Revision NOV 2026

SIMPLEX SPECIFICATIONS

General Specifications	Simplex PE 741 SS	Simplex PE 941 SS	Simplex PE 1141 SS
Number of plungers	1	1	1
Plunger dia. (in)	7	9	11
Air chambers		(1) 9”x30”	
Flanged connections		4” ANSI 125 #	
Driver speed, RPM		1200 | 1800	
Max. strokes per min.	50-62	50	50
Max. stroke length (in)	5.75	6.56	6.56
Max. total head (ft)	100	180	115
Max. rec. suction lift (ft)		20’	
Max. capacity (GPM)	60	100	140
Eccentric dia. (in)	8	10	10
Eccentric shaft tensile strength (PSI)		160,000	
Approx. weight (lbs)	400	600	800

DUPLEX SPECIFICATIONS

General Specifications	Duplex PE 942 SS	Duplex PE 1142 SS
Number of plungers	2	2
Plunger dia. (in)	9	11
Air chambers	(2) 9”x30”	
Flanged connections	4” ANSI 125 #	
Driver speed, RPM	1200 | 1800	
Max. strokes per min.	50	
Max. stroke length (in)	6.56”	
Max. total head (ft)	180	115
Max. rec. suction lift (ft)	20’	
Max. capacity (GPM)	170	247
Eccentric dia. (in)	10”	
Eccentric shaft tensile strength (PSI)	160,000	
Approx. weight (lbs)	1900	2000

TRIPLEX SPECIFICATIONS

General Specifications	Triplex PE 943 SS	Triplex PE 1143 SS
Number of plungers	3	3
Plunger dia. (in)	9	11
Air chambers	(2) 9”x30”	
Flanged connections	6” ANSI 150 #	
Driver speed, RPM	1200 | 1800	
Max. strokes per min.	50	
Max. stroke length (in)	6.56”	
Max. total head (ft)	180	115
Max. rec. suction lift (ft)	20’	
Max. capacity (GPM)	252	371
Eccentric dia. (in)	10”	
Eccentric shaft tensile strength (PSI)	160,000	
Approx. weight (lbs)	2150	2300

SLUDGE MASTER®
SPACE SAVER PLUNGER PUMPS
SS SERIES

WASTECORP. Pumps®

Pump Component	Standard Material	Optional Material
MAINSHAFT	A4140/4142 High-Strength Alloy Steel	
ECCENTRIC	ASTM A48, Class 35 Grey Iron	
LUBRICATION	Manual Sight Feed Oiler, 5 oz	a) Automatic ball-type oiler with needle valve (5 oz), b) Electric Solenoid Oiler, c) Mechanical Force Feed Lubricator
DRIVEN/DRIVE FLANGES	ASTM A48, Class 35 Grey Iron	
AIR CHAMBER	A53 Seamless Steel Pipe, Anodized/Galvanized with ¼" brass air release valve/petcock	304 or 316 Stainless Steel
SHEAR PIN	Fabricated Cold Rolled Steel	
CONNECTING ROD	ASTM A536 Grade 65-45-12 Ductile Iron	
ECCENTRIC BEARING LINER	Replaceable, Bronze SAE 660	
BUSHING, WRIST PIN	SAE 941 Oil-Lite Bronze	
WRIST PIN	A4140/4142 High-Strength Alloy Steel	
VALVE SEAT	ASTM A48, Class 35 Grey Iron	Bronze Alloy, 316 Stainless Steel
BALL VALVE	5-1/8" Urethane Rubber with Centralized Iron Core	
PLUNGER	ASTM A536 Grade 65-45-12 Ductile Iron	Coatings Available: a) Chrome Oxide, b) Aluminum Oxide, c) Tungsten Carbide, d) Hastelloy C, e) Stainless Steel
PUMP BODY	ASTM A536 Grade 65-45-12 Ductile Iron	
STUFFING BOX	ASTM A536 Grade 65-45-12 Ductile Iron	
GLAND	ASTM A48, Class 35 Grey Iron	
FLANGE CONNECTION	4" ANSI 125 lb (Simplex and Duplex Pumps) 6" ANSI 150 lb (Triplex and Quadruplex Pumps)	
PACKING	½" sq. Graphite Impregnated Braided with Poly-urethane seal	a) Graphite Rings Only, b) Chevron Rings Only, c) Combo (Graphite/Chevron), d) Plunger Pac (Chevron, Teflon and Poly-urethane seal)
PUMP BASE	Fabricated heavy-duty steel channel and tube base plate and pedestals with drip gutters and 1" drain connections	Floor Base Frame
DRIVE ARRANGEMENT	Electric Constant Speed, Vertical Gear Reducer coupled to pump's mainshaft, Max. Output Speed: 50 RPM	

Wastecorp reserves the right to make changes in materials, design specifications and price without notice.


SLUDGE MASTER®
SPACE SAVER PLUNGER PUMPS
SS SERIES

WASTECORP. Pumps®


SIMPLEX PERFORMANCE CURVES


PIN POSITION		5	6	7	8	9	10	11	12
STROKE LENGTH	INCHES	2.37	2.86	3.34	3.82	4.30	4.78	5.27	5.75
	CM	6.0	7.3	8.5	9.7	10.9	12.1	13.4	14.6

PIN POSITION		6	7	8	9	10	11
STROKE LENGTH	INCHES	3.86	4.40	4.94	5.48	6.02	6.56
	CM	9.8	11.2	12.5	13.9	15.3	16.7

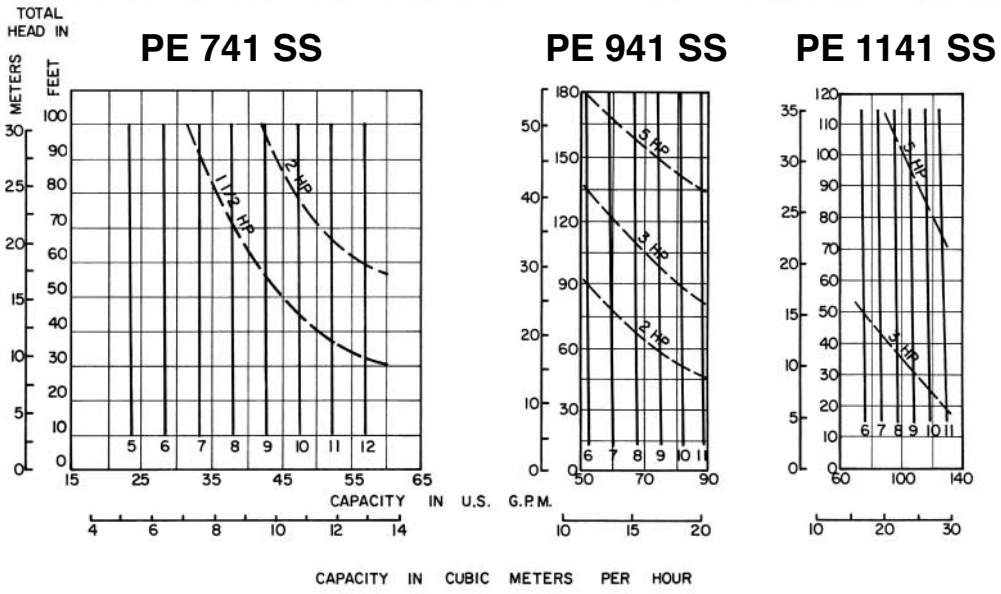

SIMPLEX DIMENSIONAL DRAWINGS

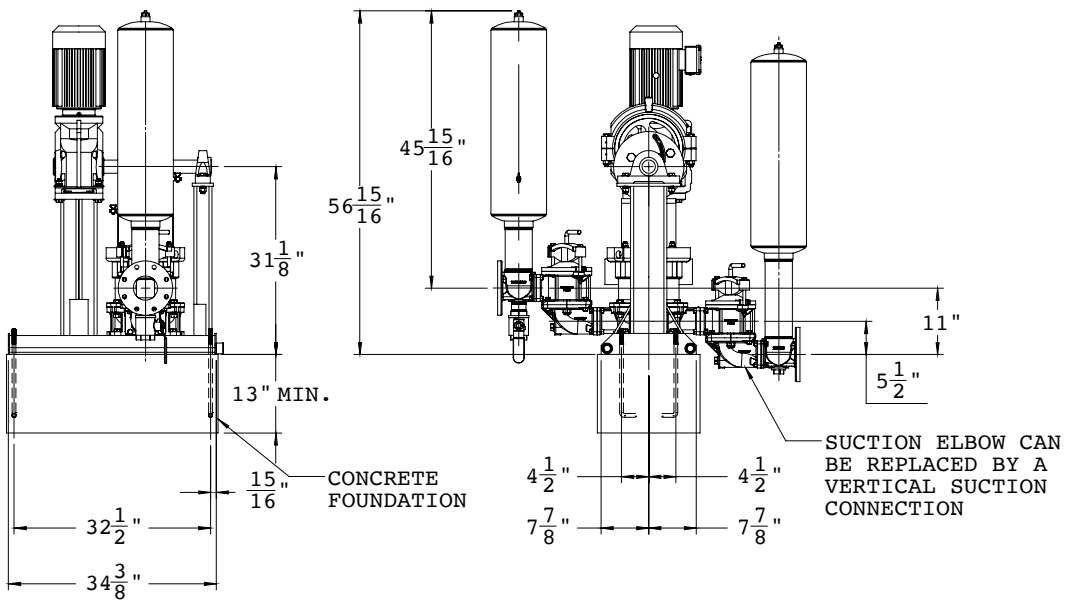

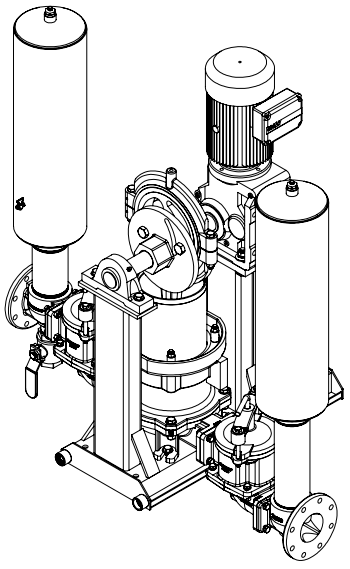

Wastecorp reserves the right to make changes in materials, design specifications and price without notice.
Drawing not for construction purposes.


The pump depictions are not meant to be used or relied upon as a substitute for the safety and use information that is published in the respective operator's manual. Before operating your plunger pump, read, understand and follow all instructions in the manual and on the pump. Specifications and programs are subject to change without notice. Images may not reflect dealer inventory and/or unit specifications. Wastecorp, PE Series, HPE Series Space Saver, Sludge Master and globes are trademarks of Wastecorp Pumps. No reproduction of this document without permission. © Wastecorp 2018.

SLUDGE MASTER®
SPACE SAVER PLUNGER PUMPS
SS SERIES


WASTECORP. Pumps®

DUPLEX PERFORMANCE CURVES


TOTAL HEAD IN	PIN POSITION	6	7	8	9	10	11
	STROKE INCHES	3.86	4.40	4.94	5.48	6.02	6.56
	LENGTH CM	9.8	11.2	12.5	13.9	15.3	16.7

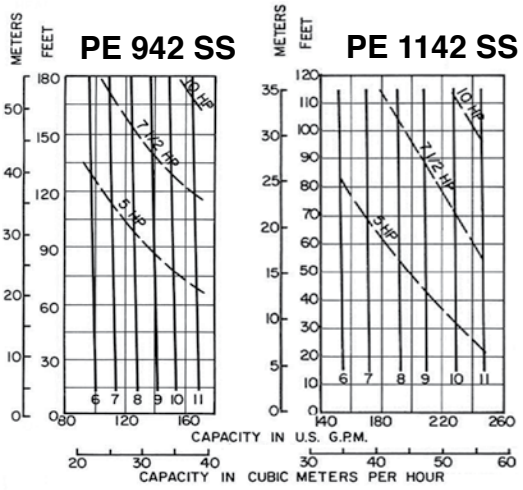

DUPLEX DIMENSIONAL DRAWINGS

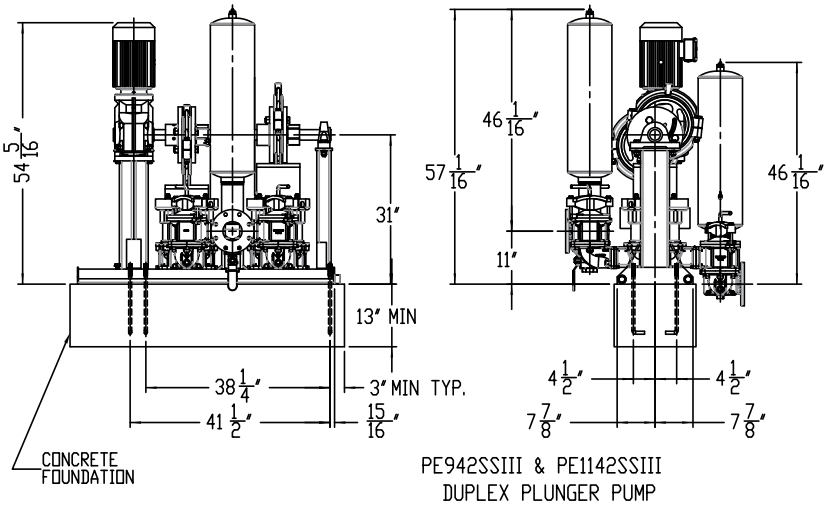

PE942SSIII & PE1142SSIII
DUPLEX PLUNGER PUMP

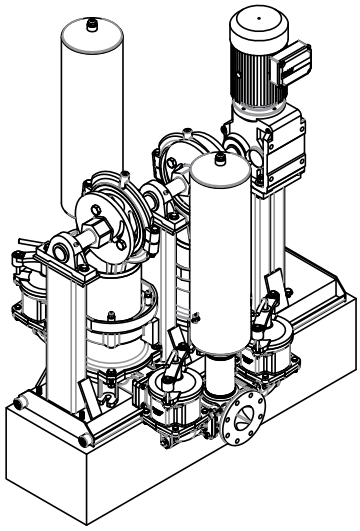


The pump depictions are not meant to be used or relied upon as a substitute for the safety and use information that is published in the respective operator's manual. Before operating your plunger pump, read, understand and follow all instructions in the manual and on the pump. Specifications and programs are subject to change without notice. Images may not reflect dealer inventory and/or unit specifications. Wastecorp, PE Series, HPE Series Space Saver, Sludge Master and globes are trademarks of Wastecorp Pumps. No reproduction of this document without permission. © Wastecorp 2018.


SLUDGE MASTER®
SPACE SAVER PLUNGER PUMPS
SS SERIES


WASTECORP. Pumps®


TRIPLEX PERFORMANCE CURVES

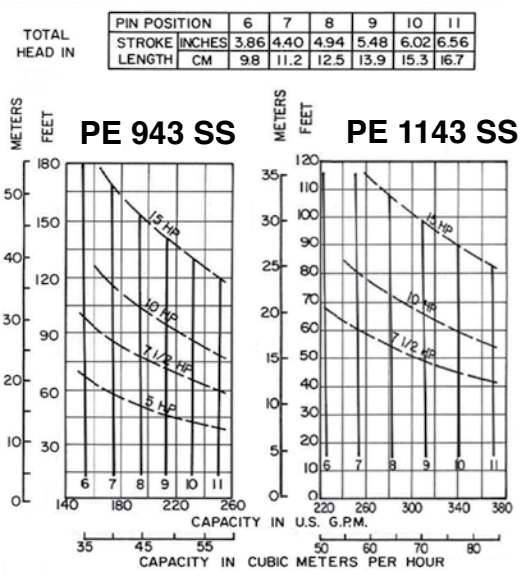

TRIPLEX DIMENSIONAL DRAWINGS

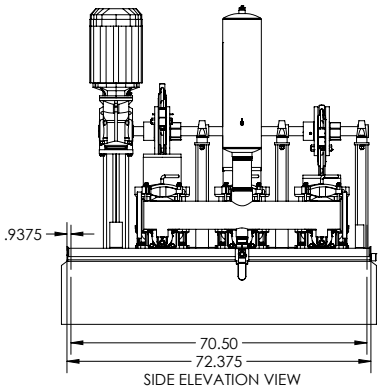

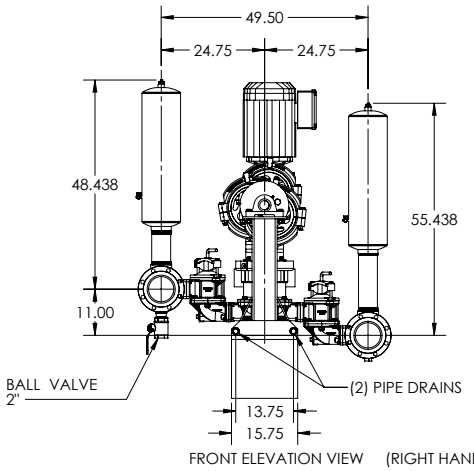

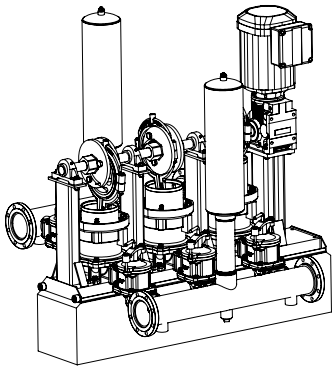
ISO VIEW

The pump depictions are not meant to be used or relied upon as a substitute for the safety and use information that is published in the respective operator's manual. Before operating your plunger pump, read, understand and follow all instructions in the manual and on the pump. Specifications and programs are subject to change without notice. Images may not reflect dealer inventory and/or unit specifications. Wastecorp, PE Series, HPE Series Space Saver, Sludge Master and globes are trademarks of Wastecorp Pumps. No reproduction of this document without permission. © Wastecorp 2018.

WASTECORP Pumps®
WASTECORP.COM

USA
Wastecorp Pumps Systems Inc
1795 Baseline Road
Grand Island, New York 14072 | USA
Tel: 888.829.2783 | Fax: 888-883-3320
sales@wastecorp.com

Canada
Wastecorp Pumps Inc.
50 Shorncliffe Road
Toronto, Ontario M8Z 5K1 | Canada
Tel: 416.233.3000 | Fax: 416.233.2300
info@wastecorp.com

Sludge Master, Wastecorp and logo are trademarks of Wastecorp Pumps and protected by international and domestic copyrights. © Wastecorp 2026. All Rights Reserved.