

Turbo Flow® Dry Prime Pumps

TFV Dry Prime Series

Automatic Self-Priming
Dry Prime Venturi Technology

TURBO FLOW® TFV DRY PRIME SERIES


TFV-8x6C



Pump Specifications

MODEL	SIZE	MAX FLOW	MAX HEAD	SOLIDS SIZE
TFV-8x6	8 x 6 inches	4400 USgpm	310 feet	1inches
	200 x 150 mm	1010 m³/h	90 metres	25 mm

Performance Curve

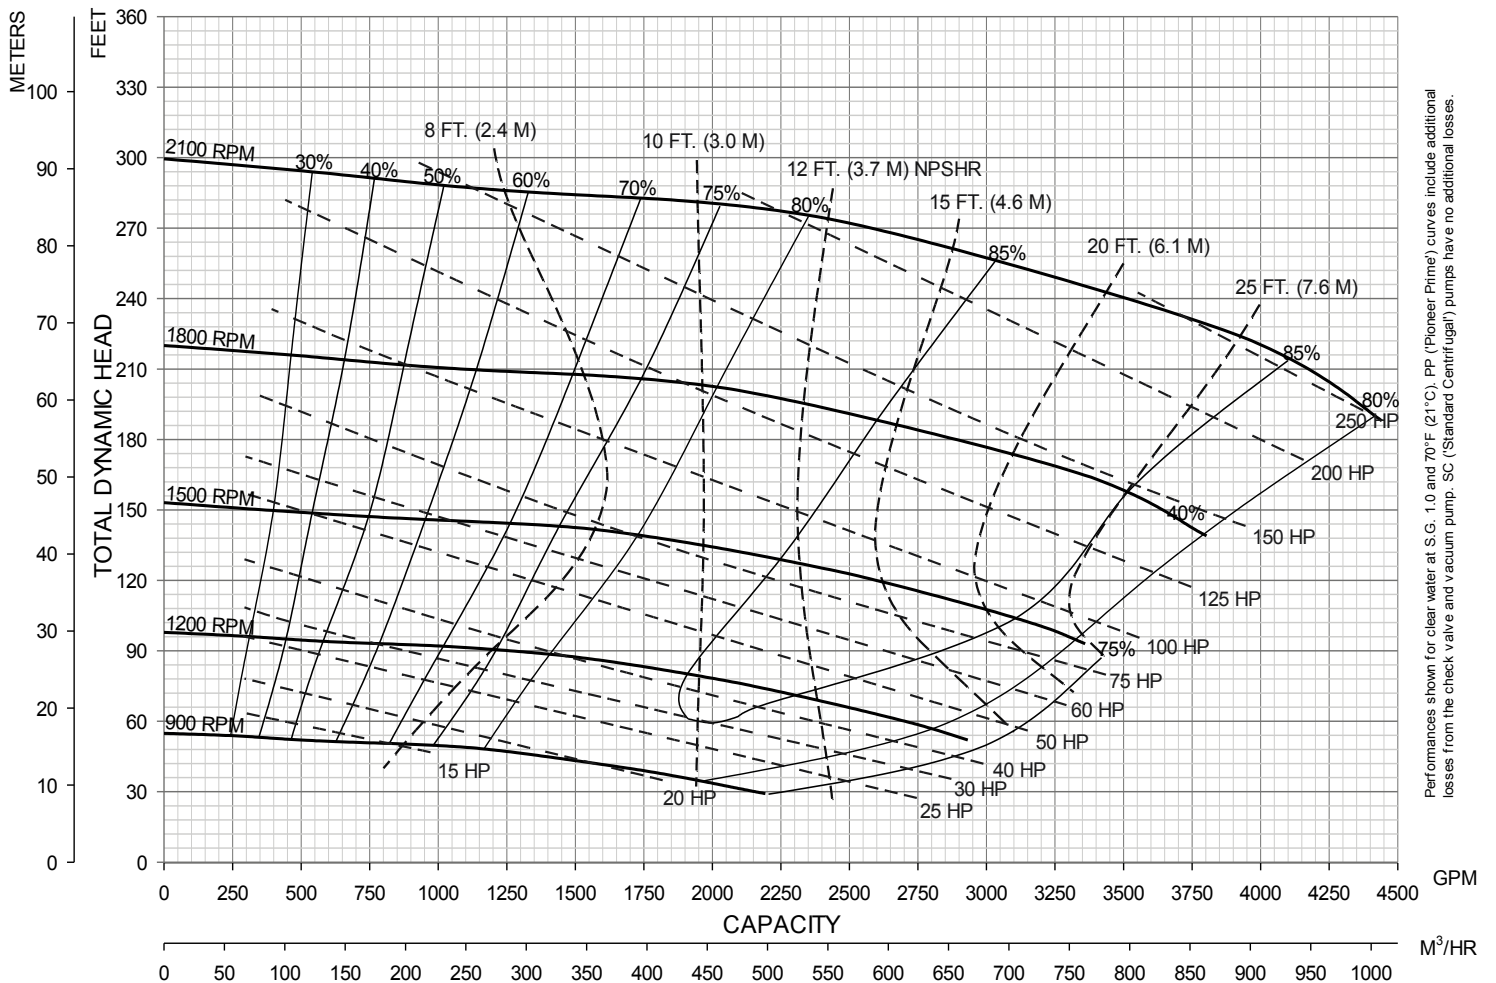

Performances shown for clear water at S.G. 1.0 and 70°F (21°C). PP ('Pioneer Prime') curves include additional losses from the check valve and vacuum pump. SC ('Standard Centrifugal') pumps have no additional losses.

Specifications and illustrations are subject to revision without notice. Wastecorp makes no representation regarding the completeness or accuracy of this information and is not liable for any consequential, incidental or indirect damages relating to these specifications.

Wastecorp Pumps USA
P.O. Box 70
Grand Island, New York 14072 | USA
Tel: 888.829.2783 | Fax: 888.883.3320
sales@wastecorp.com

Wastecorp Pumps Inc.
50 Shorncliffe Road
Toronto, Ontario M8Z 5K1 | Canada
Tel: 416.233.3000 | Fax: 416.233.2300
info@wastecorp.com