



Sludge Sucker® *Double* Grout Pumps

- 1 FA-GH-DD Series™
- 1.5 FA-GH-DD Series™
- 2FA-GH-DD Series™

FEATURES

SEVERE DUTY DESIGN FOR
PROFESSIONAL
GROUTING APPLICATIONS

YOUR CHOICE OF 1", 1.5"
OR 2" CONNECTION

3.5 GALLON HOPPER
FUNNEL


LIGHT WEIGHT MOBILITY
SYSTEM



THE FLAWLESS PUMPING PERFORMANCE PROFESSIONALS EXPECT.

Sludge Sucker® manual DOUBLE grout pump provide the ultimate in water based cementitious type grout pumping such as those made by Dayton®, Sika®, Five Star®, BASF Masterflow® and others. The Sludge Sucker features a completely redesigned crank mechanism to assist in pumping thicker grouts and select concrete based materials. Sludge Sucker® Grout pumps perform best when the grout ratio consistency is between fluid and flowable. *Sludge Sucker® grout pumps are not recommended to transfer chemical based epoxy grouts.

PROFESSIONAL GROUT PUMPS SYSTEMS FOR COMMERCIAL AND RESIDENTIAL APPLICATIONS

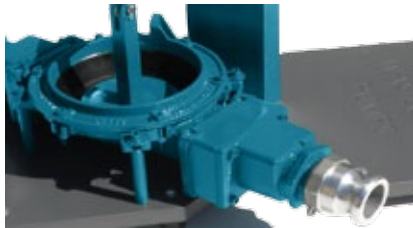

SLUDGE SUCKER® DIAPHRAGM PUMP TECHNOLOGY.

The Sludge Sucker is a severe duty design using the latest advances in diaphragm pump technology. Fluid flows more productively through the pump body making your job easier and quicker than ever before.



COMPLETELY REDESIGNED CRANK ARM **NEW**

When you have thicker grouting jobs to finish, your manual grout pump better have a reinforced crank mechanism to withstand stroke after stroke of use. Wastecorp's new design extends the life of your grout pump up to 50% longer than comparable makes.



SLICK HOPPER FUNNELS

Our 3.5 gallon hopper funnel keeps you productive with up to 1.2 quarts of grout transferred per stroke. Plus, the bevelled rim reduces mess on your job site.

† See pump specifications for solids handling information.

WASTECORP.COM

SLUDGE SUCKER® MANUAL GROUT PUMPS


• info@wastecorp.com

• 1-888-829-2783

Sludge Sucker® Double Grout Pumps



APPROX. DIMENSIONS

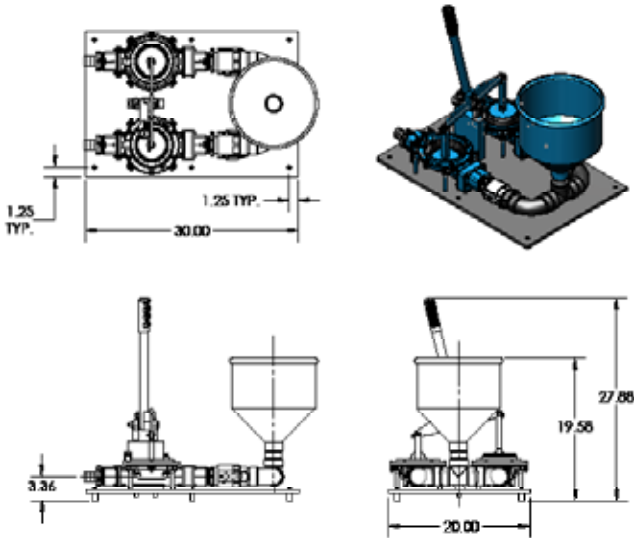

OPTIONAL ACCESSORIES FOR SLUDGE SUCKER® GROUT PUMPS



SPARE PARTS KIT P/N: 62754-00

Have parts ready when you need them.
Order Genuine Wastecorp spare parts
with your new Sludge Sucker.



Grout Injector Hose P/N: 62279-00

Non-collapsible green injector hose. 10'
length standard. Professional duty.



Grout Injector Wand P/N: 62473-00

Make grouting tight or hard-to-reach
areas a snap with our injector wand.

Sludge Sucker® Performance Range

1", 1.5" or 2" Connection

Max. capacity:	40 GPM *
Max Output Pressure:	0-20 psi
Max. Discharge head:	10' vertical/25' horizontal
Max. Solids handling:	1.5" dia or 50% by volume

Sludge Sucker® Specifications

Double Grout Pump Series

Part Number	63833-10 (1") 63833-15 (1.5") 63833-20 (2")
Max. liquid temperature	140° F (60° C) continuous
Pump body casing	Aluminum
Diaphragm	7" dia. fabric reinforced Buna-N
Flapper valves	Fabric reinforced Viton
Power source	Manual
Feed hopper capacity	3.5 gallons (.47 ft³)
Feed hopper material	Galvanized steel
Portable Base	High density polyethylene with anti-vibration feet
Connection	Aluminum male camlock
Inlet/outlet flanges	Aluminum
Hardware	Stainless steel

* @ 2.4 quarts per stroke (based on water)

SLUDGE SUCKER® MANUAL GROUT PUMPS

Designed and Manufactured by Wastecorp Pumps in North America.

Toll-Free: 1.888.829.2783 Email: info@wastecorp.com
International: +1-201-445-2882



Sludge Sucker manual grout pumps are operated by hand. These pumps are specified for the following industries and applications: public works grouting jobs, commercial grout pumping, residential door frame grouting, industrial grout pumping and select cement pumping applications. Specifications and programs are accurate at the time of publication but subject to change without notice. Images may not reflect dealer inventory and/or unit specifications. Wastecorp, Sludge Sucker and globes are trademarks of Wastecorp, WPCI Environmental Brands. No reproduction of this document without permission. © Wastecorp 2015.