WASTECORP Pumps®

TRASH FLOW®

ENGINE DRIVEN TRASH PUMPS

TFCC-4ML™

Value Prime™

FEATURES

- TRANSFER UP TO 700 GPM
- MAX. HEAD 85 FT.
- HEAVY DUTY BEARINGS AND CASTINGS
- EASILY REMOVABLE ROTATING ASSEMBLY
- VACUUM PRIME ASSIST AVAILABLE*
- “SILENT” PUMPING MODEL AVAILABLE*
- QUICK SELF PRIMING CAPABILITIES
- DOUBLE FLOATING MECHANICAL SEAL
- DUAL LIP SEAL BEARING PROTECTION

*optional



Images shown are for reference only


PUMP UTILITY MEETS PUMP VERSATILITY.

The new Trash Flow TFCC-4ML Value Prime series from Wastecorp is the ultimate ecomomical self priming trash pump in a heavy duty package. The TFCC-4ML provides the basics for conquering all kinds of municipal or industrial applications with budget conscious end users in mind. Available in trailer mounted or skid mounted models.

TRASH FLOW® TFCC-4ML - OPTIONAL CONFIGURATIONS

WITH OR WITHOUT WHEELS
THE TFCC-4ML MOVES WASTEWATER.

The TFCC-4ML is available as a skid mounted model with optional heavy duty lifting bail to move around your job site. With a wide variety of diesel engine and control panel options available, you’ll get exactly what you need for your job.

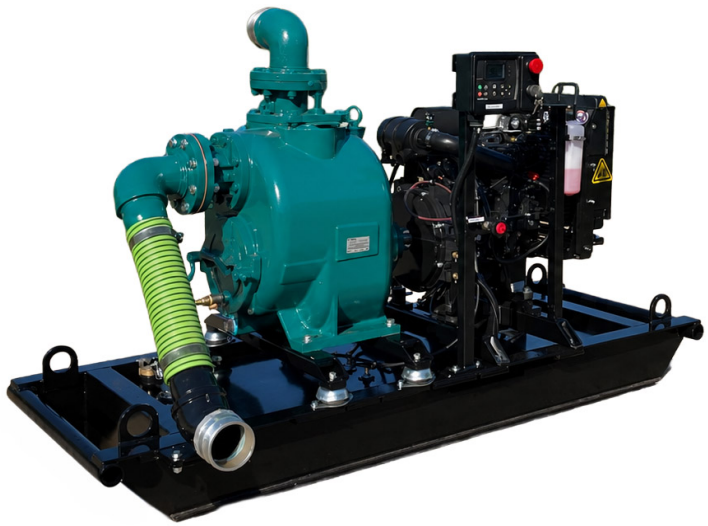

TRASH FLOW®
ENGINE DRIVEN TRASH PUMPS
TFCC-4ML™


Value Prime™

WASTECORP Pumps®

FEATURES



REMOVABLE ROTATING ASSEMBLY
Experience less downtime and maintenance hassles with the Trash Flow's removable rotating assembly. The pump volute and piping are not disturbed during maintenance.



DOUBLE FLOATING MECHANICAL SEAL
Wastecorp's mechanical seals are designed for the harsh pumping conditions in today's municipal and industrial solids handling jobs.



SOLIDS HANDLING IMPELLERS
Trash Flow pumps feature our standard premium two-vane solids handling impellers with solids handing capabilities up to 3" (75mm).



OPTIONAL SUCTION AND DISCHARGE GAUGES
Monitor operating pressure easily with Wastecorp's optional suction and discharge gauges.

OPTIONAL CONFIGURATIONS



SEWAGE LIFT STATIONS
Let our pump designers engineer the ultimate lift station for your facility. We offer complete packaged solutions including control panels, valves and more.





TRAILER OR SKID MOUNT ENGINE
With our trailer or skid mounted diesel engine trash pumps, you'll get a DOT approved solutions for mobile wastewater transfer


Model	Trash Flow® TFCC-4ML
Connection Size	4" x 4" [101 mm x 101 mm] ANSI/DIN
Max. GPM	700 GPM
Max. Suction Lift	20 ft (7m)
Max. Discharge Head	85 ft
Max. Liquid Temp.	160°F (71°C)
Pump Casing	Grey Iron, ASTM A48; Class 30
Operating Pressure	Maximum 120 psi (797 kPa)
Impeller	8.50" OD, Ductile Iron ASTM A536, Grade 60-40-18 (Impeller Trimming: If required) Semi-Open Type, Two-Vane Impeller, (two plane, computer dynamically balanced)
Max. Solids Handling	3" (80mm)
Impeller Shaft	ANSI 4140 steel
Replaceable Wear Plate	SAE 1020 steel
Removable Cover Plate	Grey Iron, ASTM A48; Class 30
Flapper Valve	Neoprene with internal steel weight
Bearing Housing	Grey Iron, ASTM A48; Class 30 (includes oil sight glass and breather valve)
Seal Plate	Grey Iron, ASTM A48; Class 30
Shaft Sleeve	316 Stainless Steel
Radial/Thrust Bearing	NSK Open Ball
Bearing/Seal Cavity Lubrication	SAE No. 30 Non-Detergent Oil
Gaskets	Buna-N, Compressed Synthetic Fibers, PTFE, Vegetable Fiber, Cork and Rubber
Hardware	Standard Plated Steel, Brass Pressure Relief Valve, Bearing and Seal Cavity Oil Level Sight Gauges
Mechanical Seal	Double floating cartridge type, titanium tungsten carbide rotating and stationary faces, 316SS casing and spring, Viton O-Rings.
Engine and Trailer Information	
Trailer	Single Axle DOT compliant with e-brakes, fenders, lighting, swivel jack, ball hitch or pintel eye coupler
Coupling	SAE Rubber Disk Drive fly-wheel couplin
Engine & Control Panel	24HP Deutz D1.2 diesel engine c/w muffle , control panel, 12V starter & alternator, battery
Fuel Tank	DOT Compliant 80 USG (302.833 L) complete with fuel lines and mounting brackets

Note: Consult factory for applications exceeding maximum pressure and/or temperature indicated.

Dimensions - Trailer Mounted

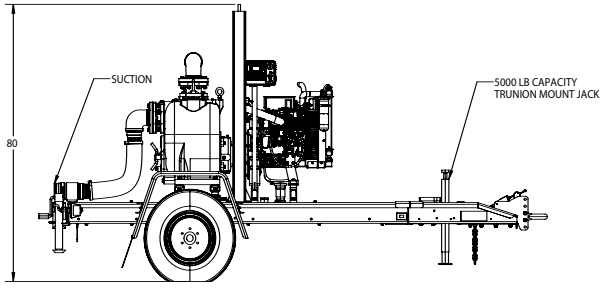



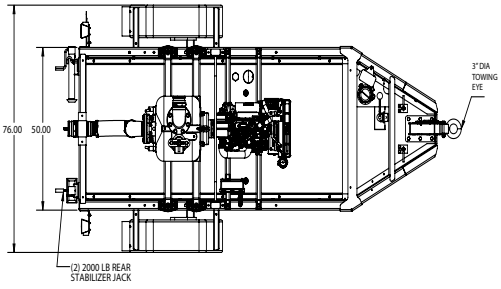


Dimensions and weight are approximate. Wastecorp Pumps reserves the right to make changes in design, materials and operating ranges without notice.

TRASH FLOW®
ENGINE DRIVEN TRASH PUMPS
TFCC-4ML™


Value Prime™

WASTECORP Pumps®

Dimensions - Skid Mounted

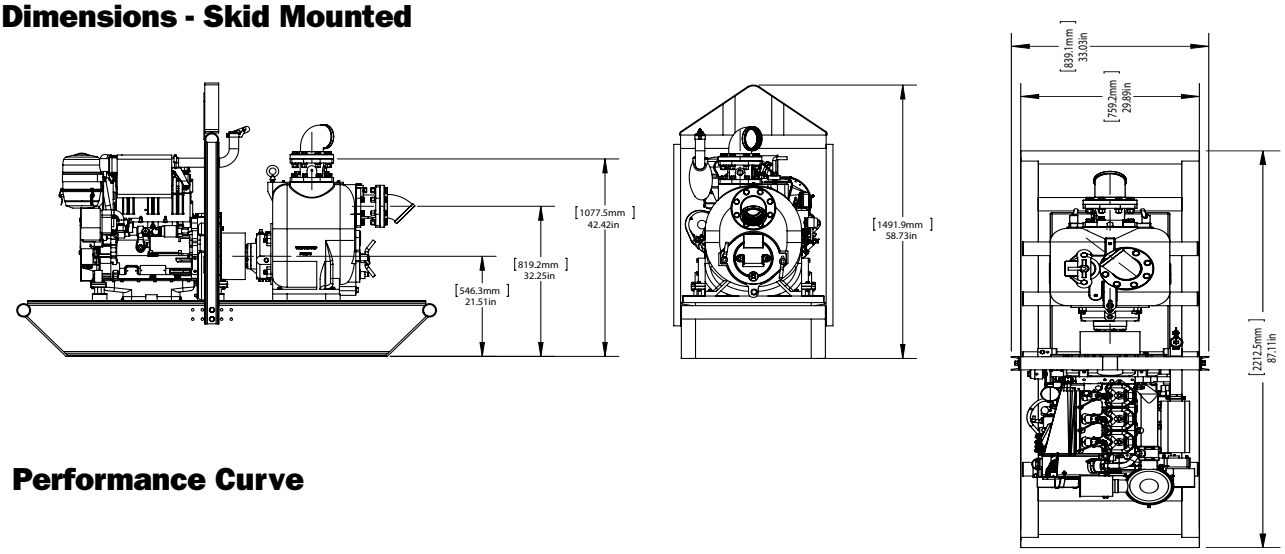

Performance Curve

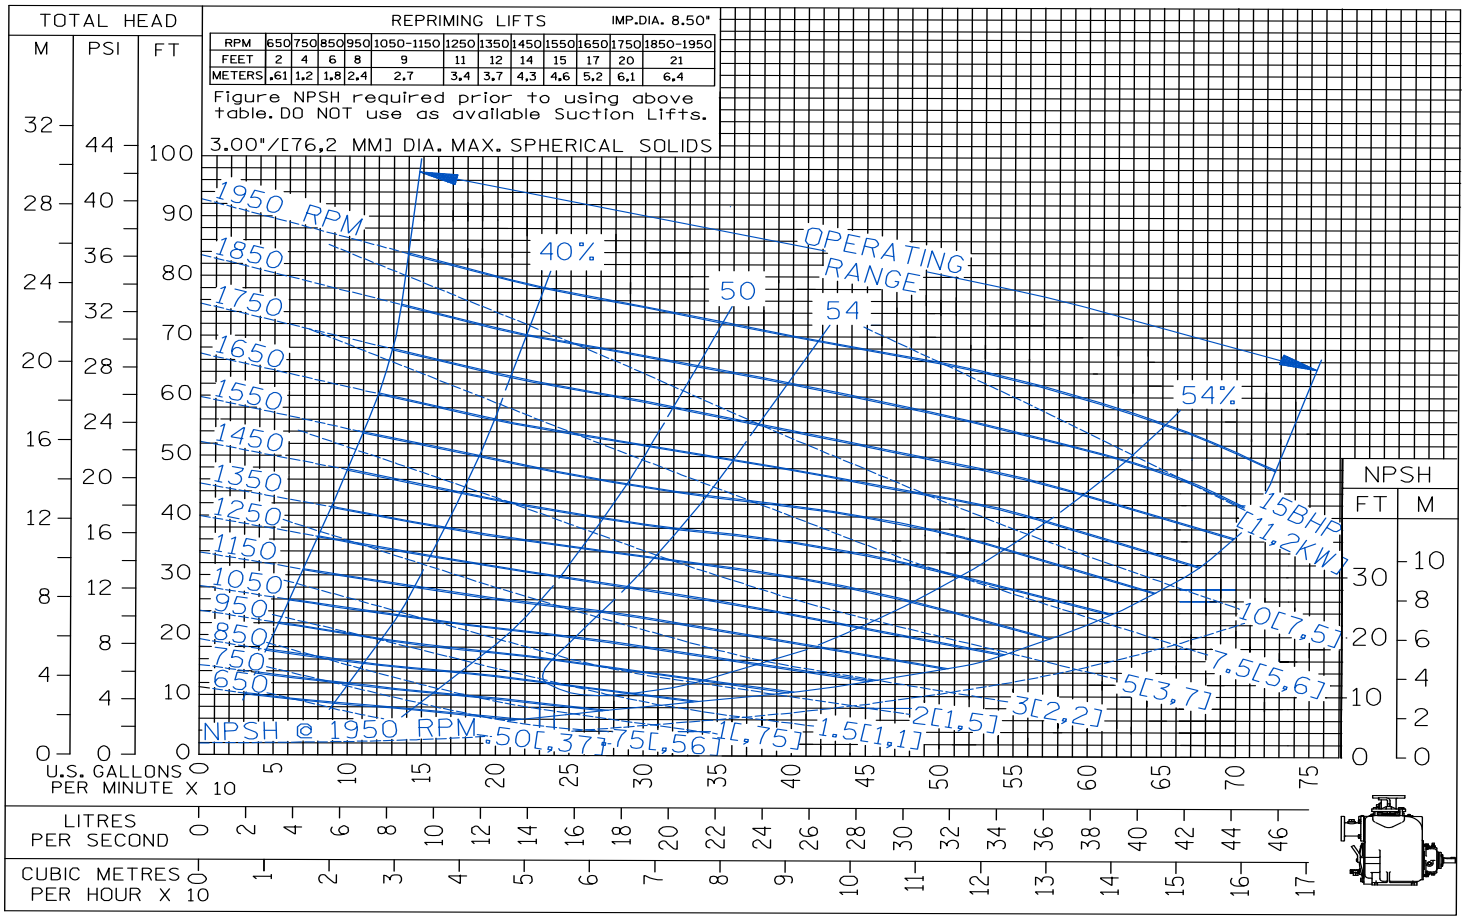

WASTECORP Pumps®
WASTECORP.COM

Wastecorp Pump Systems Inc (USA)
1795 Baseline Rd
Grand Island, New York 14072 | USA
Tel: 888.829.2783 | Fax: 888.883.3320
sales@wastecorp.com

Wastecorp Pumps Inc. (Canada)
50 Shorncliffe Road
Toronto, Ontario M8Z 5K1 | Canada
Tel: 416.233.3000 | Fax: 416.233.2300
info@wastecorp.com

Trash Flow, Wastecorp and logo are trademarks of Wastecorp Pumps and protected by international and domestic copyrights. © 2026 Wastecorp. All Rights Reserved.