WASTECORP Pumps®

TRASH FLOW®

ENGINE DRIVEN TRASH PUMPS

TFCC-6ML™

FEATURES

- TRANSFER UP TO 1430 GPM
- MAX. HEAD 104ft
- HEAVY DUTY BEARINGS AND CASTINGS
- EASILY REMOVABLE ROTATING ASSEMBLY
- VACUUM PRIME ASSIST AVAILABLE*
- “SILENT” PUMPING MODEL AVAILABLE*
- QUICK SELF PRIMING CAPABILITIES
- DOUBLE FLOATING MECHANICAL SEAL
- DUAL LIP SEAL BEARING PROTECTION

*optional

WASTECORP.COM



Images shown are for reference only

INTRODUCING THE NEW TRASH FLOW TFCC-6ML ™

ALL THE PUMPING POWER. ALL THE DURABILITY.

Only one 6” trash pump is miles ahead of the others. The Trash Flow TFCC-6ML is available in skid mounted or trailer mounted units with up to 1430 GPM capabilities. You can also select silent pumping systems with our specialized Husher™ acoustical hut model.

TRASH FLOW® TFCC-6M - OPTIONAL CONFIGURATIONS



With or Without Wheels The TFCC-6ML Moves Wastewater

The TFCC-6ML is available as a skid mounted model complete with a heavy duty lifting bail to move around your job site. With a wide variety of diesel engine and control panel options available, you’ll get exactly what you need for your job.



Pumping in Residential Areas?
The Trash Flow Can Quiet Down

One of the challenges when using a trash pump in residential areas is adhering to local noise regualtions. Wastecorp’s solution is the Trash Flow Husher with an acoustical hut to keep sound below 70 dBa.



Intermittent Flow a Problem? “Vacuum Prime Assist” is The Solution

Vacuum prime assist is ideal when pumping fluid with large volumes of air or pulling through long suction lines. It is also environmentally friendly as there is no carryover of liquid into the environment because of the unique float box design.


TRASH FLOW®
ENGINE DRIVEN TRASH PUMPS
TFCC-6ML™

WASTECORP Pumps®

FEATURES



REMOVABLE ROTATING ASSEMBLY
Experience less downtime and maintenance hassles with the Trash Flow's removable rotating assembly. The pump volute and piping are not disturbed during maintenance.



DOUBLE FLOATING MECHANICAL SEAL
Wastecorp's mechanical seals are designed for the harsh pumping conditions in today's municipal and industrial solids handling jobs.



SOLIDS HANDLING IMPELLERS
Trash Flow pumps feature our standard premium two-vane solids handling impellers with solids handing capabilities up to 3" (75mm).



OPTIONAL SUCTION AND DISCHARGE GAUGES
Monitor operating pressure easily with Wastecorp's optional suction and discharge gauges.

OPTIONAL CONFIGURATIONS




SEWAGE LIFT STATIONS
Let our pump designers engineer the ultimate lift station for your facility. We offer complete packaged solutions including control panels, valves and more.





SOUND-ATTENUATED ENCLOSURES
When your application calls for an enclosure to reduce noise or provide added security, Wastecorp's Husher® models provide noise reduction below 70 dBa and lockable doors.

Model	Trash Flow® TFCC-6ML
Connection Size	6" x 6" (152mm x 152mm)] ANSI/DIN
Max. GPM	1430 GPM
Max. Suction Lift	25 ft (7.52m)
Max. Discharge Head	104 ft.
Max. Liquid Temp.	160°F (71°C)
Pump Casing	Grey Iron, ASTM A48; Class 30
Operating Pressure	Maximum 120 psi (797 kPa)
Impeller	Max. 11.25" OD, Ductile Iron ASTM A536, Grade 60-40-18 (Impeller Trimming: If required) Semi-Open Type, Two-Vane Impeller, (two plane, computer dynamically balanced)
Max. Solids Handling	3" (76 mm)
Impeller Shaft	ANSI 4140 steel
Replaceable Wear Plate	SAE 1020 steel
Removable Cover Plate	Grey Iron, ASTM A48; Class 30
Flapper Valve	Neoprene with internal steel weight
Bearing Housing	Grey Iron, ASTM A48; Class 30 (includes oil sight glass and breather valve)
Seal Plate	Grey Iron, ASTM A48; Class 30
Shaft Sleeve	316 Stainless Steel
Radial/Thrust Bearing	NSK Open Ball
Bearing/Seal Cavity Lubrication	SAE No. 30 Non-Detergent Oil
Gaskets	Buna-N, Compressed Synthetic Fibers, PTFE, Vegetable Fiber, Cork and Rubber
Hardware	Standard Plated Steel, Brass Pressure Relief Valve, Bearing and Seal Cavity Oil Level Sight Gauges
Mechanical Seal	Double floating cartridge type, titanium tungsten carbide rotating and stationary faces, 316SS casing and spring, Viton O-Rings.
Engine and Trailer Information	
Trailer	Single Axle DOT compliant with e-brakes, fenders, lighting, swivel jack, ball hitch or pintel eye coupler
Coupling	SAE Rubber Disk Drive fly-wheel couplin
Engine & Control Panel	56HP Hatz 3H50-TIC Tier 4 Final diesel engine
Fuel Tank	DOT Compliant 80 USG (302.833 L) complete with fuel lines and mounting brackets

Note: Consult factory for applications exceeding maximum pressure and/or temperature indicated.

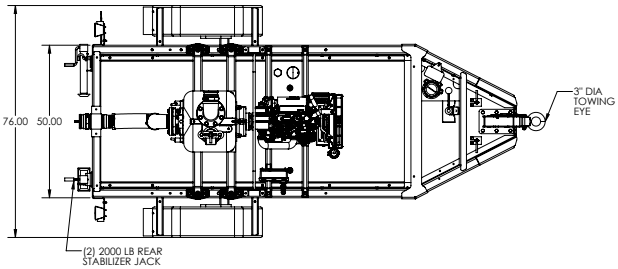

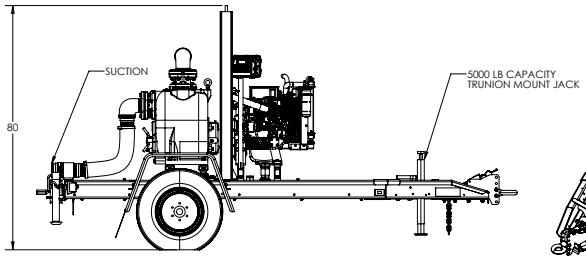




All information is approximate and is intended for general guidance only. Wastecorp Pumps reserves the right to make changes in design, materials and operating ranges without notice.

TRASH FLOW®

ENGINE DRIVEN TRASH PUMPS

TFCC-6ML™

WASTECORP Pumps®

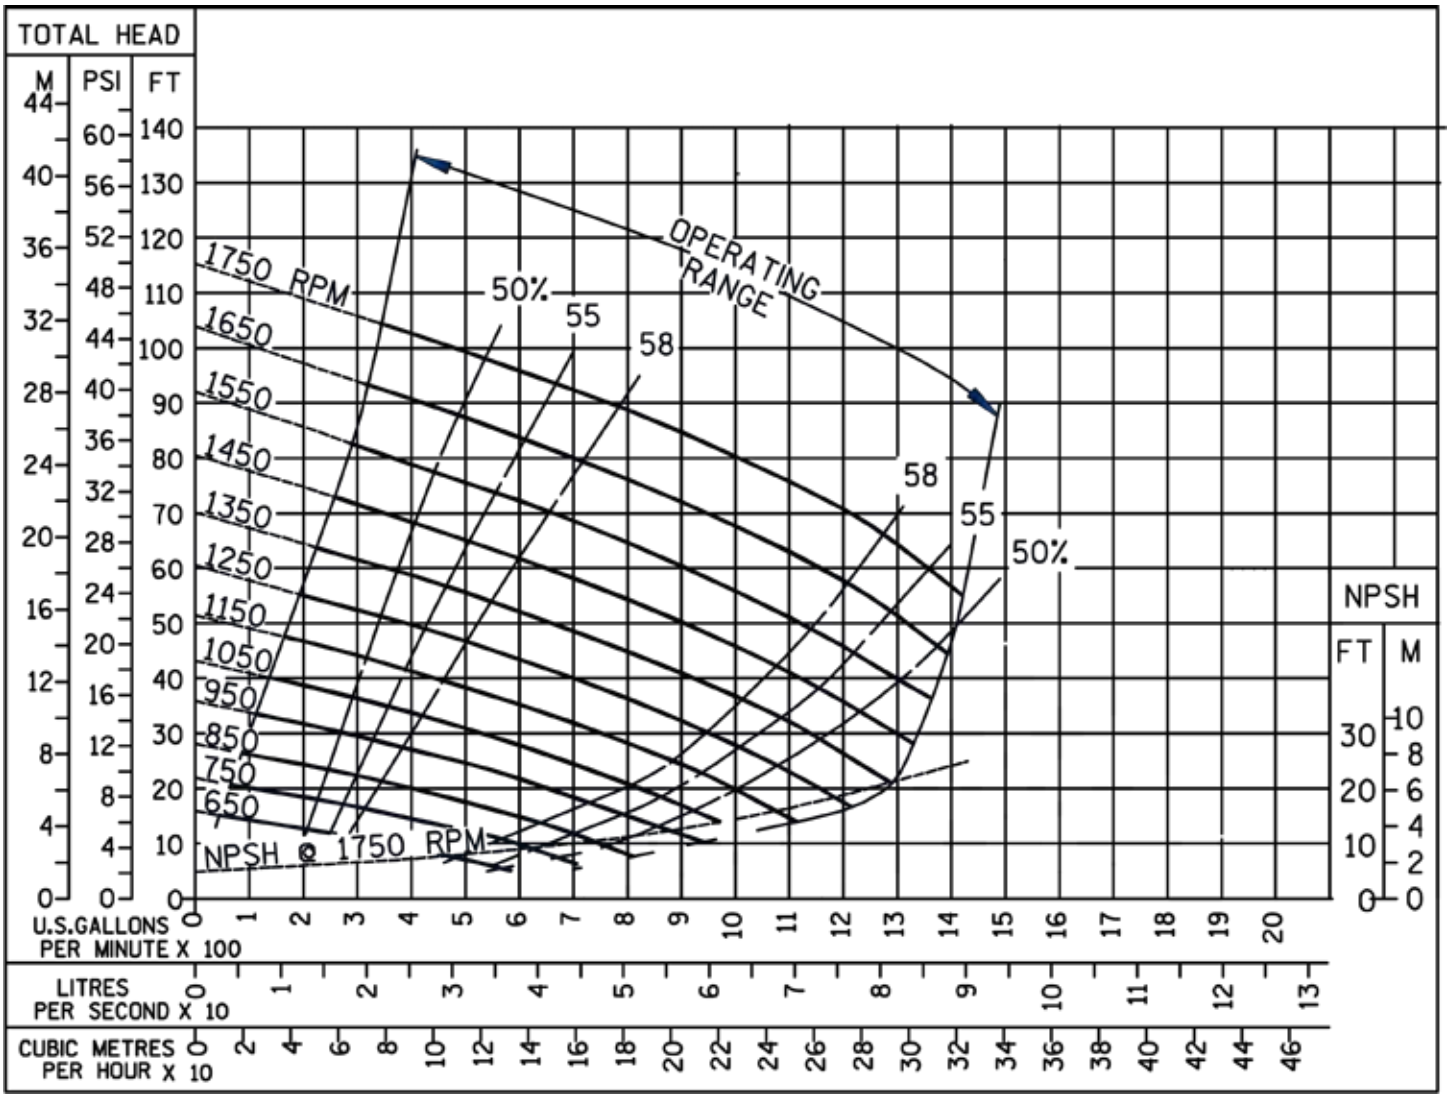

WASTECORP Pumps®

WASTECORP.COM

Wastecorp Pump Systems Inc (USA)
1795 Baseline Rd
Grand Island, New York 14072 | USA
Tel: 888.829.2783 | Fax: 888.883.3320
sales@wastecorp.com

Wastecorp Pumps Inc. (Canada)
50 Shorncliffe Road
Toronto, Ontario M8Z 5K1 | Canada
Tel: 416.233.3000 | Fax: 416.233.2300
info@wastecorp.com

Trash Flow, Wastecorp and logo are trademarks of Wastecorp Pumps and protected by international and domestic copyrights. © Wastecorp 2026. All Rights Reserved.